




S系列斜齿轮—蜗轮蜗杆减速电机
S Series Helical-worm Gear Units

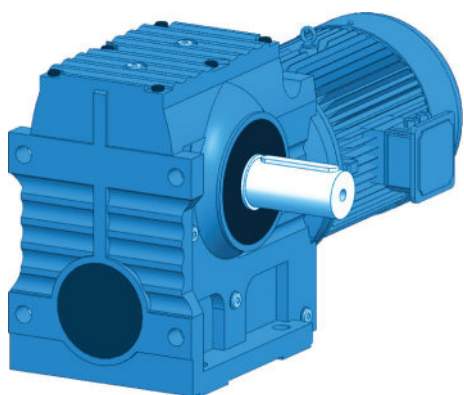

S- 底脚安装轴伸式斜齿轮—蜗轮蜗杆减速电机
S- Foot-mounted with Shaft-extension Type

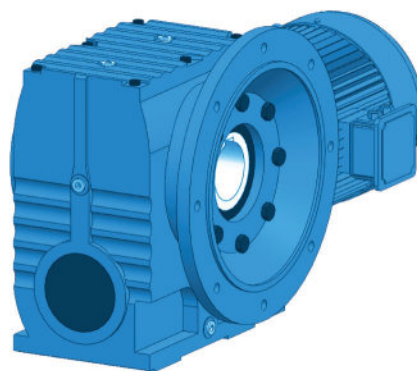



SA-A-F 法兰空心轴安装斜齿轮—蜗轮蜗杆减速电机
SA-A-F Flange-mounted with Hollow shaft

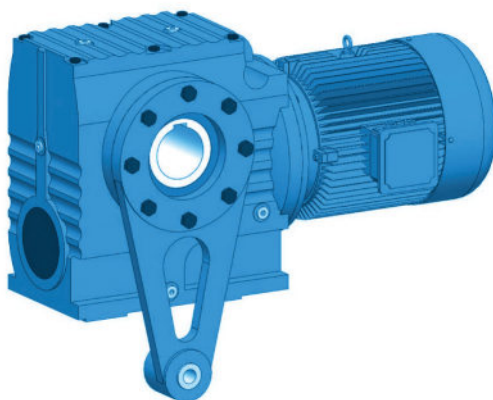

SA-A-T 力矩臂空心轴斜齿轮—蜗轮蜗杆减速电机
SA-A-T Torque arm-mounted with Hollowshaft



可以提供下列型号斜齿轮减速电机 / Available Versions





S-Y

底脚安装斜齿轮—蜗轮蜗杆减速电机

S-Y

Foot-mounted


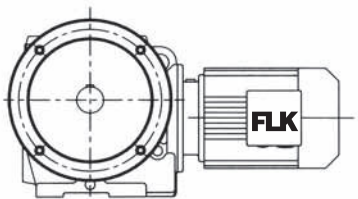


SA-F-Y

B5法兰安装斜齿轮—蜗轮蜗杆减速电机

SA-F-Y

B5 Flange-mounted


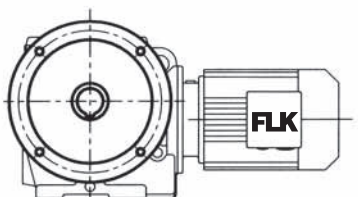


SA-A-F-Y

B5法兰空心轴安装斜齿轮—蜗轮蜗杆减速电机

SA-A-F-Y

B5 Flange mounted with Hollow shaft


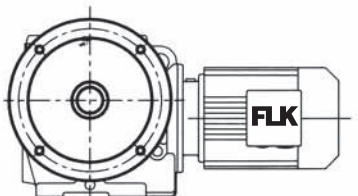


SA-H-F-Y

B5法兰空心轴锁紧盘安装斜齿轮—蜗轮蜗杆减速电机

SA-H-F-Y

B5 Flange Hollow shaft with shrink disk mounted





SA-A-Y

空心轴斜齿轮—蜗轮蜗杆减速电机

SA-A-Y

Hollow shaft





SA-H-Y

空心轴锁紧盘安装斜齿轮—蜗轮蜗杆减速电机

SA-H-Y

Hollow shaft with shrink disk mounted





SA-A-Z-Y

B14法兰空心轴安装斜齿轮—蜗轮蜗杆减速电机

SA-A-Z-Y

B14 Flange with Hollow-shaft mounted





SA-H-Z-Y

B14法兰空心轴锁紧安装斜齿轮—蜗轮蜗杆减速电机

SA-H-Z-Y

B14 Flange Hollow-shaft with shrink disk mounted





SA-A-T

力矩臂空心轴安装斜齿轮—蜗轮蜗杆减速电机

SA-A-T

Torque-arm with Hollow-shaft mounted





S-AD

轴输入型斜齿轮—蜗轮蜗杆减速电机

S-AD

Input Shaft type



S-RF-F

多级串联的组合式斜齿轮—蜗轮蜗杆减速电机


S-RF-F

The combination of Multi-stage series type




型号与标记 / Type Designation

S - H- F- 97 -RF -F- 57 -62.55 -Y-5.5KW - 4P -M1 -J1-ZZ-AZ

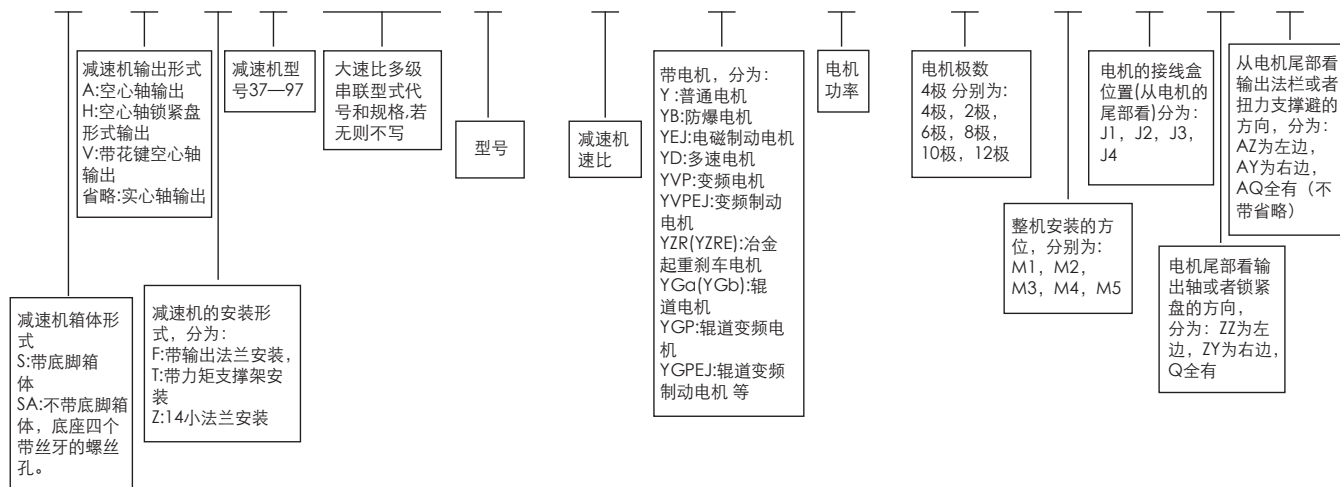

S - H- F- 97 -RF -F- 57 -62.55 -Y -5.5KW - 4P -M1 -J1-ZZ-AZ

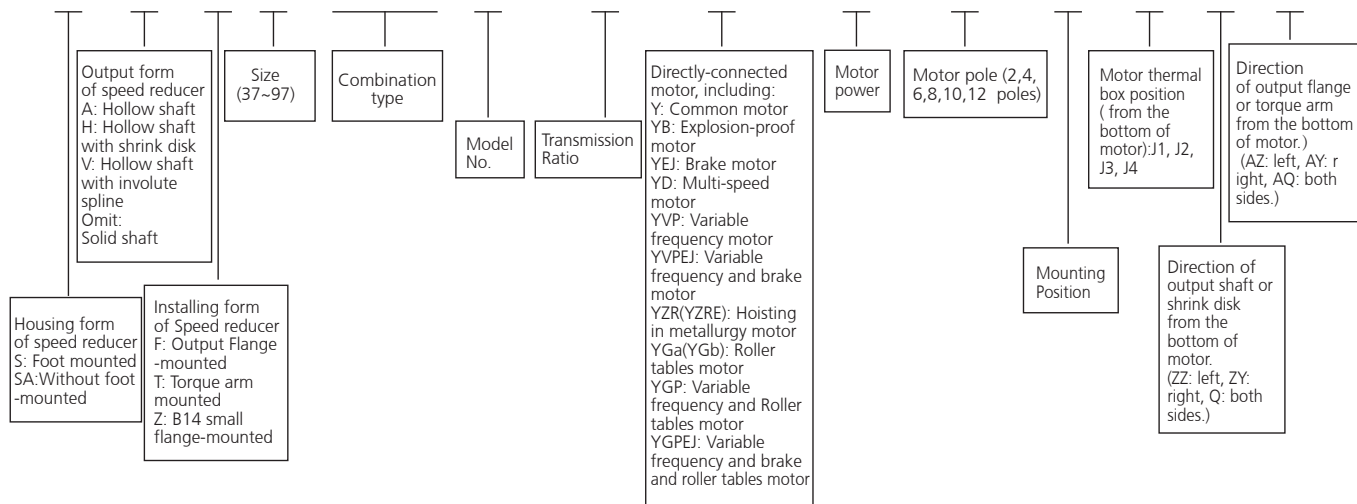

① 带直联电机单组减速机 Directly-connected motor speed reducer

S-H-F-97-62.55-Y-5.5KW-4P-M1-J1-ZZ-AZ

② 带直联电机双组减速机 Directly-connected motor Speed reducer(Combination type)

S-H-F-97-RF-F-57-62.55-Y-5.5KW-4P-M1-J1-ZZ-AZ

③ 带电机带输入法兰 With motor and input flange

S-H-F-97-62.55-AM132B5-Y-5.5KW-4P-M1-J1-ZZ-AZ

④ 不带电机带输入法兰 Input flange-mounted, without motor

S-H-F-97-62.55-AM132B5-M1-J1-ZZ-AZ

⑤ 带输入轴 With input shaft

S-H-F-97-62.55-AD4-M1-ZZ-AZ


AM132B5: 带过度法兰电机的IEC标准法兰尺寸(可查阅电机样本)

AD4: 轴输入 输入轴的大小分为: AD1, AD2, AD3, AD4, AD5, AD6, AD7, AD8.

AM132B5: Dimension of IEC flange (please refer to our catalogue)

AD4: Input shaft (AD1, AD2, AD3, AD4, AD5, AD6, AD7, AD8)


安装形式 / Mounting Positions:

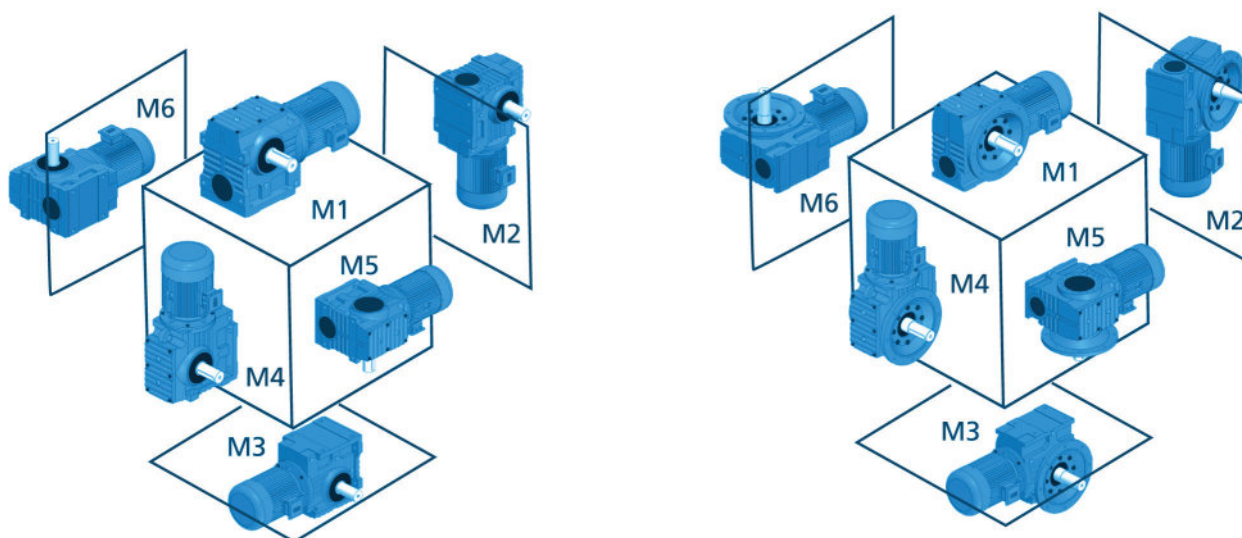


电机接线盒位置 / Position Of The Motor Thermal Box




J1(0°)



J2(270°)



J3(180°)



J4(90°)

速比范围与最大扭矩 / Transmission Ratio Range & Maximum Torque

机型号 Size	37	47	57	67	77	87	97
结构形式 Type	S/SA-F						
传动比 Trans- mission ratio	6.80~157.43	7.28~201	7.28~201	7.56~217.41	8.06~256.47	7.88~288	8.26~286.4
最大扭矩 (N·m) Maximum torque (N.m)	90	170	300	520	1270	2280	4000

s系列减速机注油量见下表：（表中数值仅为参考值，具体以减速机油位孔位置为准）

Data in the table is for reference, operation is subject to oil level and oil sight glass.

润滑油量表 / Lubricant Sheet

机型号 / Size	润滑油量(升) / Lubricant (liter)					
	M1	M2	M3 ¹⁾	M4	M5	M6
S-37	0.25	0.4	0.5	0.6	0.4	0.4
S-47	0.35	0.8	0.7	1.1	0.8	0.8
S-57	0.5	1.2	1	1.	1.3	1.3
S-67	1	2.0	2.2/3.1	3.2	2.6	2.6
S-77	1.9	4.2	3.7/5.4	6	4.4	4.4
S-87	3.3	8.1	6.9/10.4	12	8.4	8.4
S-97	6.8	15	13.4/18	22.5	17	17

SA-F-

机型号 / Size	润滑油量(升) / Lubricant (liter)					
	M1	M2	M3 ¹⁾	M4	M5	M6
SA-F-37	0.25	0.4	0.5	0.6	0.4	0.4
SA-F-47	0.4	0.9	0.9	1.2	1.0	1.0
SA-F-57	0.5	1.2	1	1.6	1.4	1.4
SA-F-67	1	2.2	2.3/3	3.2	2.7	2.7
SA-F-77	1.9	4.1	3.9/5.8	6.5	4.9	4.9
SA-F-87	3.8	8	7.1/10.1	12	9.1	9.1
SA-F-97	7.4	15	13.8/18.8	23.6	18	18


SA-A、SA-A-F、SA-A-F-

机型号 / Size	润滑油量(升) / Lubricant (liter)					
	M1	M2	M3 ¹⁾	M4	M5	M6
SA-A-F-37	0.25	0.4	0.5	0.6	0.4	0.4
SA-A-F-47	0.4	0.8	0.7	1.1	0.8	0.8
SA-A-F-57	0.5	1.1	1	1.6	1.2	1.2
SA-A-F-67	1	2.0	1.8/2.6	2.9	2.5	2.5
SA-A-F-77	1.8	3.9	3.6/5	5.9	4.5	4.5
SA-A-F-87	3.8	7.4	6/8.7	11.2	8	8
SA-A-F-97	7	14	11.4/16	21	15.7	15.7

注：1)表示减速机为组合型时低速级所加油量为大值。

Note: 1) Combinational type at low speed is the maximum quantity of oil.

承载能力表的结构 / Capacity Table Structure

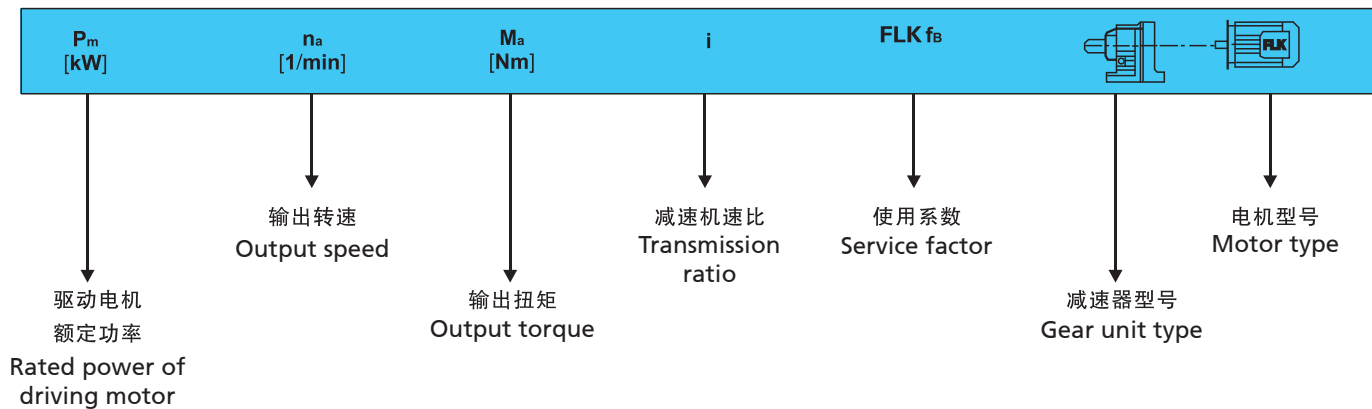


S系列减速机重量 (KG)

型号Type	S37	S47	S57	S67	S77	S87	S97
重量Weight	8	10	13.5	25	43	85	149

说明：带输入轴输入法兰的机型重量约增加20%，带电机的机型根据所配电机的重量而增加。


Note: Weight of reducer with input flange should be added 20%, if there is a motor, please add weight according to motor.

结构示意图 / Sectional Drawings

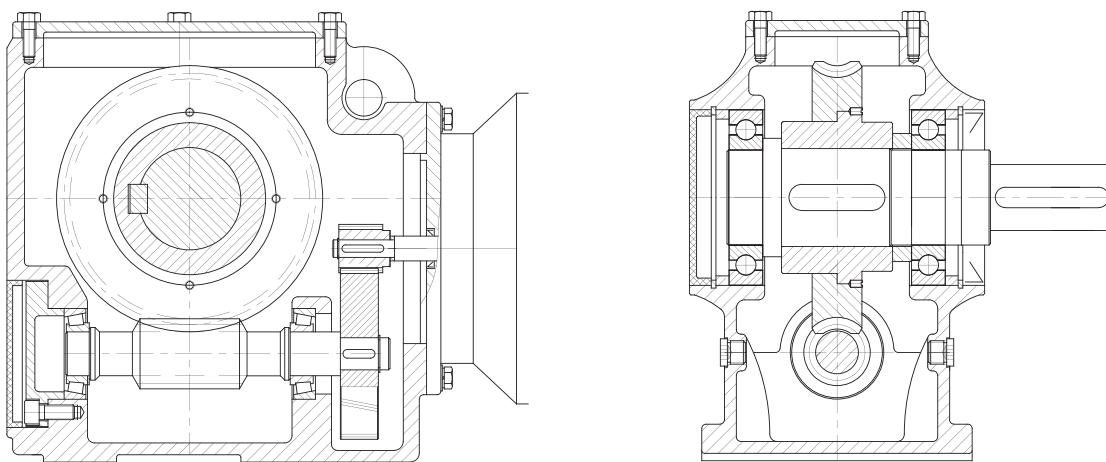


S-Y


S, S-F, SA-A-F, SA-A, SA-H, SA-T, SA-A-Z, SA-H-Z-Y

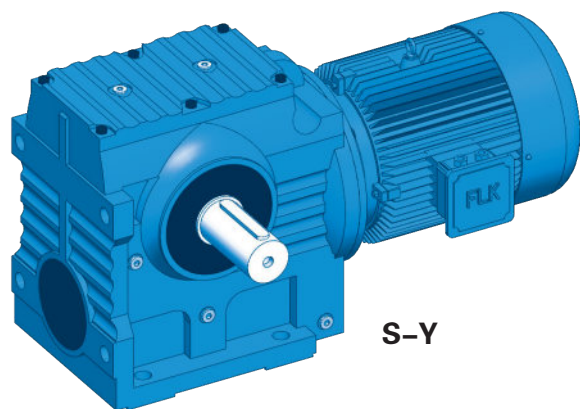


S-Y

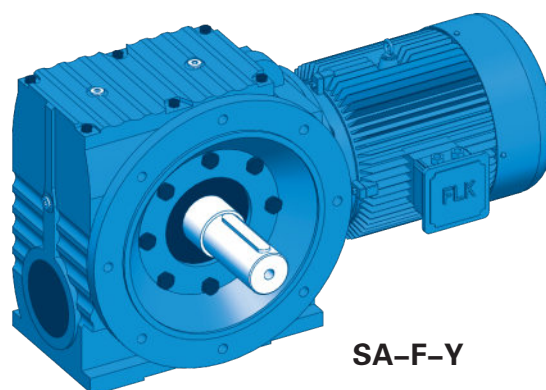


SA-F-Y

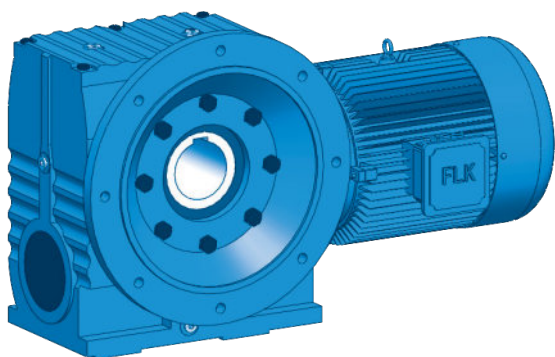


SA-A-F-Y

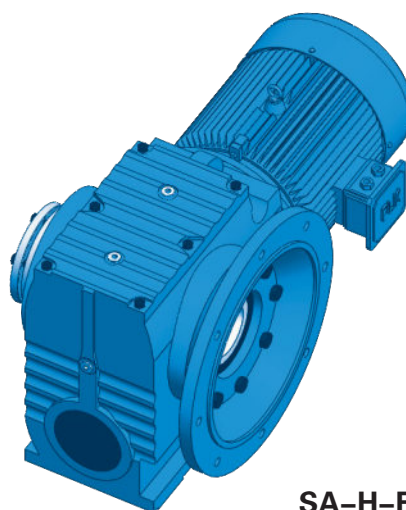


SA-H-F-Y

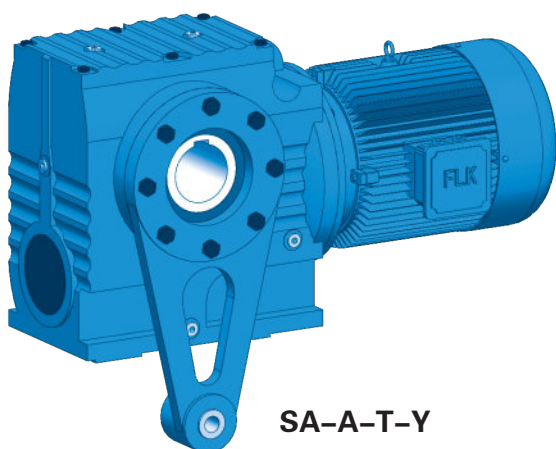


SA-A-T-Y

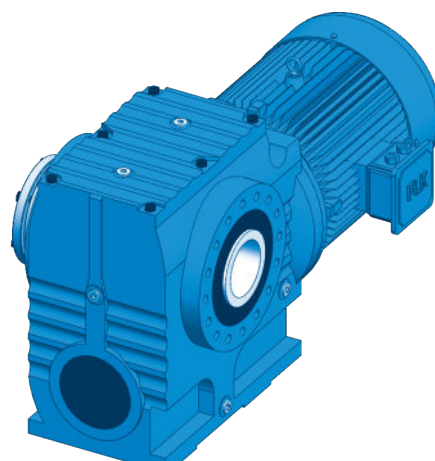

SA-H-Y

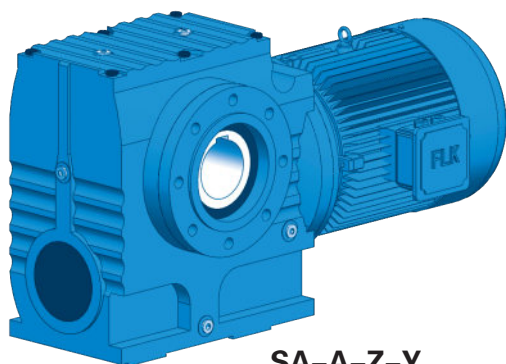

SA-A-Z-Y

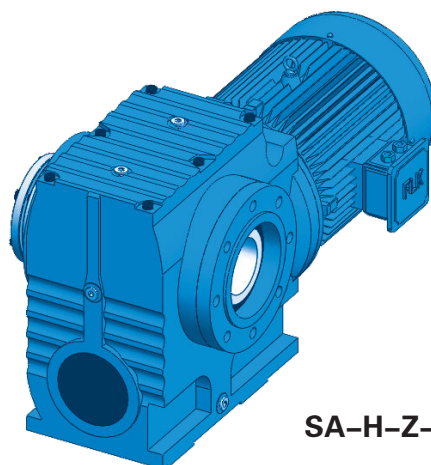

SA-H-Z-Y



输出转速 Output speed (r/min)	输出扭矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出扭矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole
0.12KW						0.12KW					
0.12	4610	11267	0.90	S97-RF57	4P	6.9	95	201.00	1.80		
0.14	4210	10078	1.00	SF97-RF57	4P	7.5	89	184.80	1.90	S-47	4P
0.16	3500	8608	1.20	SA97-RF57	4P	8.7	77	158.12	2.2	SA-F-47	4P
0.18	3090	7554	1.35	SAF97-RF57	4P	10	68	137.05	2.5	SA-A-47	4P
						11	64	128.10	2.6	SA-A-F-47	4P
						12	57	110.73	3.0		
0.18	3120	7643	0.80			5.7	107	157.43	0.85		
0.21	2630	6706	0.95	S87-RF57	4P	6.2	99	144.40	0.95	S-37	6P
0.23	2330	5875	1.05	SF87-RF57	4P	7.3	86	122.94	1.05	SA-F-37	6P
0.27	1960	5187	1.25	SA87-RF57	4P	8.5	76	106.00	1.20	SA-A-37	6P
0.30	1740	4606	1.45	SAF87-RF57	4P	9.1	71	98.80	1.30	SA-A-F-37	6P
0.36	1450	3872	1.70			10	64	86.36	1.45		
0.39	1340	3540	0.95			8.8	74	157.43	1.25		
0.45	1170	3098	1.10			9.6	68	144.40	1.35		
0.58	1280	2374	0.95	S77-RF37	4P	11	60	122.94	1.55		
0.66	1130	2083	1.10	SF77-RF37	4P	13	52	106.00	1.70		
0.76	960	1813	1.30	SA77-RF37	4P	14	49	98.80	1.75		
0.79	910	1745	1.35	SAF77-RF37	4P	16	44	86.36	1.95		
0.86	840	1600	1.50			17	41	80.96	2.1	S-37	4P
0.98	735	1404	1.70			19	37	71.44	2.3	SA-F-37	4P
1.1	645	1245	1.90			22	33	63.33	2.5	SA-A-37	4P
						25	35	55.93	2.3	SA-A-F-37	4P
1.0	665	1363	0.85			27	33	51.30	2.5		
1.2	575	1194	1.00	S67-RF37	4P	32	28	43.68	2.9		
1.3	515	1045	1.10	SF67-RF37	4P	37	25	37.66	3.2		
1.5	445	914	1.30	SA67-RF37	4P	39	23	35.10	3.4		
1.7	400	809	1.40	SAF67-RF37	4P	45	20	30.68	3.7		
1.9	355	712	1.60			48	19	28.76	3.9		
2.2	295	615	1.95			54	17	25.38	4.3		
2.5	265	543	2.2			61	15	22.50	4.8		
2.9	220	469	2.6			69	14	19.89	3.6		
3.3	197	424	2.9			76	13	18.24	3.9		
3.8	180	365	3.2			89	11	15.53	4.4		
2.1	315	655	0.95			0.18KW					
2.4	275	574	1.10			0.29	2970	4606	0.85		
2.7	240	506	1.25	S57-RF17	4P	0.34	2480	3872	1.00		
3.2	210	438	1.45	SF57-RF17	4P	0.38	2350	3475	1.05		
3.6	183	388	1.65	SA57-RF17	4P	0.45	1970	2905	1.10	S87-RF57	4P
4.1	163	336	1.85	SAF57-RF17	4P	0.51	1710	2586	1.25	SF87-RF57	4P
4.7	140	294	2.1			0.57	1520	2335	1.45	SA87-RF57	4P
5.1	134	269	2.2			0.64	1320	2054	1.90	SAF87-RF57	4P
						0.72	1170	1824	2.1		
3.2	210	438	0.90			0.81	1050	1631	2.4		
3.6	183	388	1.00			0.94	1220	1404	1.00		
4.1	162	336	1.15	S47-RF17	4P	1.1	1070	1245	1.15		
4.7	139	294	1.35	SF47-RF17	4P	1.2	990	1100	1.25	S77-RF37	4P
5.4	113	257	1.95	SA47-RF17	4P	1.4	850	954	1.45	SF77-RF37	4P
6.0	99	229	1.65	SAF47-RF17	4P	1.6	745	837	1.65	SA77-RF37	4P
6.9	95	200	1.90			1.9	625	714	2.0	SAF77-RF37	4P
7.4	92	187	2.0			2.1	555	637	2.2		
						2.3	500	574	2.5		
6.8	99	202	0.95			1.6	660	809	0.85		
7.7	88	179	1.05	S37-RF17	4P	1.9	580	712	1.00		
8.7	78	158	1.15	SF37-RF17	4P	2.2	490	615	1.15	S67-RF37	4P
9.6	72	144	1.25	SA37-RF17	4P	2.4	440	543	1.30	SF67-RF37	4P
12	59	118	1.55	SAF37-RF17	4P	2.8	370	469	1.55	SA67-RF37	4P
13	55	110	1.65			3.1	335	424	1.70	SAF67-RF37	4P
						3.6	295	365	1.90		
4.5	143	201.00	2.1	S-57	6P	3.0	345	438	0.85		
4.9	133	184.80	2.2	SA-F-57	6P	3.4	305	388	1.00	S57-RF17	4P
5.7	116	158.12	2.5	SA-A-57	6P	3.9	270	336	1.10	SF57-RF17	4P
6.6	103	137.05	2.9	SA-A-F-57	6P	4.5	235	264	1.30	SA57-RF17	4P
						4.9	220	269	1.35	SAF57-RF17	4P
4.5	138	201.00	1.30								
4.9	129	184.80	1.40	S-47	6P						
5.7	112	158.12	1.55	SA-F-47	6P						
6.6	99	137.05	1.75	SA-A-47	6P						
7.0	93	128.10	1.85	SA-A-F-47	6P						

输出转速 Output speed (r/min)	输出扭矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出扭矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole
0.18KW						0.25KW					
5.8	188	229	1.60	S57-RF17	4P	0.45	2860	2905	0.85		
6.5	169	204	1.80	SF57-RF17	4P	0.50	2500	2586	1.00	S87-RF57	4P
7.1	154	187	1.95	SA57-RF17	4P	0.63	2240	2335	1.10	SF87-RF57	4P
				SAF57-RF17	4P	0.71	1950	2054	1.30	SA87-RF57	4P
4.5	230	294	0.80			0.80	1550	1631	1.60	SAF87-RF57	4P
5.1	158	257	1.15			1.4	910	930	2.8		
5.8	185	229	1.00	S47-RF17	4P	1.4	1230	954	1.00	S77-RF37	4P
6.6	162	200	1.15	SF47-RF17	4P	1.5	1080	837	1.15	SF77-RF37	4P
7.1	152	187	1.20	SA47-RF17	4P	1.8	910	714	1.35	SA77-RF37	4P
8.0	134	165	1.40	SAF47-RF17	4P	2.0	810	637	1.55	SAF77-RF37	4P
8.9	121	148	1.55			2.3	730	574	1.70		
10	108	131	1.70			2.6	625	499	2.0		
4.0	255	217.41	2.5	S-67	6P	2.4	635	543	0.90		
4.6	225	190.11	2.5	SA-F-67	6P	2.8	540	469	1.05	S67-RF37	4P
4.8	215	180.60	2.6	SA-A-67	6P	3.1	485	424	1.15	SF67-RF37	4P
				SA-A-F-67	6P	3.6	430	365	1.30	SA67-RF37	4P
4.3	220	201.00	1.35	S-57	6P	4.1	375	319	1.50	SAF67-RF37	4P
4.7	205	184.80	1.45	SA-F-57	6P	4.6	330	281	1.75		
5.5	180	158.12	1.65	SA-A-57	6P						
6.3	159	137.05	1.85	SA-A-F-57	6P	4.4	340	294	0.90	S57-RF17	4P
						4.8	315	269	0.95	SF57-RF17	4P
6.6	154	201.00	1.90	S-57	4P	5.7	270	229	1.10	SA57-RF17	4P
7.1	143	184.80	2.1	SA-F-57	4P	6.4	245	204	1.25	SAF57-RF17	4P
8.4	125	158.12	2.4	SA-A-57	4P	6.9	225	187	1.35		
9.6	110	137.05	2.7	SA-A-F-57	4P	7.9	198	165	1.50		
						9.9	159	131	1.90		
4.3	215	201.00	0.85	S-47	6P	3.1	435	217.41	1.30	S-67	8P
4.7	199	184.80	0.90	SA-F-47	6P	3.6	390	190.11	1.45	SA-F-67	8P
5.5	173	158.12	1.00	SA-A-47	6P	3.8	370	180.60	1.50	SA-A-67	8P
6.3	153	137.05	1.10	SA-A-F-47	6P	4.3	330	158.45	1.70	SA-A-F-67	8P
6.8	144	128.10	1.20								
6.6	149	201.00	1.15			4.1	350	217.41	1.60	S-67	6P
7.1	138	184.80	1.25			4.6	310	190.11	1.80	SA-F-67	6P
8.4	121	158.12	1.40	S-47	4P	4.9	295	180.60	1.90	SA-A-67	6P
9.6	107	137.05	1.60	SA-F-47	4P	5.6	265	158.45	2.1	SA-A-F-67	6P
10	100	128.10	1.65	SA-A-47	4P						
12	88	110.73	1.90	SA-A-F-47	4P	6.0	245	217.41	2.1		
14	77	94.08	2.2			6.8	220	190.11	2.4	S-67	4P
16	69	84.00	2.4			7.2	210	180.60	2.5	SA-F-67	4P
18	60	71.75	2.8			8.2	187	158.45	2.8	SA-A-67	4P
19	69	69.36	2.2			9.7	161	134.40	3.2	SA-A-F-67	4P
						11	147	121.33	3.5		
8.4	115	157.43	0.80			12	131	106.75	4.0		
9.1	107	144.40	0.85								
11	93	122.94	1.00			4.4	305	201.00	1.00		
12	82	106.00	1.10			4.8	285	184.80	1.05	S-57	6P
13	77	98.8	1.15			5.6	245	158.12	1.20	SA-F-57	6P
15	68	86.36	1.25			6.4	220	137.05	1.35	SA-A-57	6P
16	64	80.96	1.30			6.9	205	128.10	1.45	SA-A-F-57	6P
18	58	71.44	1.45								
21	52	63.66	1.60	S-37	4P	6.5	215	201.00	1.35		
24	55	55.93	1.45	SA-F-37	4P	7.0	200	184.80	1.45		
26	51	51.30	1.60	SA-A-37	4P	8.2	176	158.12	1.70	S-57	4P
30	44	43.46	1.85	SA-A-F-37	4P	9.5	155	137.05	1.90	SA-F-57	4P
35	38	37.66	2.1			10	146	128.10	2.0	SA-A-57	4P
38	36	35.10	2.2			12	129	110.73	2.3	SA-A-F-57	4P
43	32	30.68	2.4			14	111	94.08	2.7		
46	30	28.76	2.5			15	101	84.00	2.9		
52	27	25.38	2.8								
59	24	22.50	3.1			6.5	210	201.00	0.80		
66	22	19.89	2.3			7.0	195	184.80	0.85		
72	21	18.24	2.5			8.2	170	158.12	1.00	S-47	4P
85	18	15.53	2.8			9.5	150	137.05	1.10	SA-F-47	4P
99	15	13.39	3.2			10	141	128.10	1.20	SA-A-47	4P
106	14	12.48	3.4			12	124	110.73	1.3	SA-A-F-47	4P
121	13	10.91	3.8			14	108	94.08	1.55		
129	12	10.23	4.0			15	98	84.00	1.70		
						18	85	71.75	1.95		
						19	97	69.39	1.60		



输出转速	输出扭矩	传动比	使用系数	机型号	电机级数	输出转速	输出扭矩	传动比	使用系数	机型号	电机级数
Output speed	Output torque	Ratio (i)	Service factor (fB)	Type	Motor pole	Output speed	Output torque	Ratio (i)	Service factor (fB)	Type	Motor pole
(r/min)	(N.M)					(r/min)	(N.M)				
0.25KW						0.37KW					
19	80	67.20	2.1	S-47	4P	6.3	345	217.41	1.50		
20	90	63.80	1.70	SA-F-47	4P	7.3	310	190.11	1.70	S-67	4P
24	78	54.59	2.0	SA-A-47	4P	7.6	295	180.60	1.75	SA-F-67	4P
27	68	47.32	2.3	SA-A-F-47	4P	8.7	260	158.45	2.0	SA-A-67	4P
						10	225	134.40	2.3	SA-A-F-67	4P
						11	205	121.33	2.5		
13	108	98.80	0.80			5.7	360	158.12	0.80		
15	96	86.36	0.90			6.6	315	137.05	0.95	S-57	6P
16	91	80.96	0.95			7.0	300	128.10	1.00	SA-F-57	6P
18	81	71.44	1.05			8.1	265	110.73	1.10	SA-A-57	6P
21	73	63.33	1.10			9.6	230	94.08	1.30	SA-A-F-57	6P
23	78	55.93	1.05	S-37	4P	11	205	84.00	1.45		
25	72	51.30	1.15	SA-F-37	4P						
30	62	43.68	1.30	SA-A-37	4P						
35	54	37.66	1.45	SA-A-F-37	4P						
37	51	35.10	1.55								
42	45	30.68	1.70			6.9	305	201.00	0.95		
45	42	28.76	1.80			7.5	285	184.80	1.05		
51	37	25.38	2.0			8.7	245	158.12	1.20		
58	33	22.50	2.2			10	220	137.05	1.35	S-57	4P
65	32	19.89	1.65			11	205	128.10	1.45	SA-F-57	4P
71	29	18.24	1.80			12	180	110.73	1.65	SA-A-57	4P
84	25	15.53	2.0			15	156	94.08	1.90	SA-A-F-57	4P
97	22	13.39	2.3			16	141	84.00	2.1		
104	20	12.48	2.4			19	122	71.75	2.4		
119	18	10.91	2.7			20	139	69.39	1.75		
127	19	10.23	2.8			21	115	67.20	2.5		
144	15	9.02	3.1			22	128	63.80	1.90		
163	13	8.00	3.4								
191	11	6.80	3.8								
						10	210	137.05	0.80		
						11	199	128.10	0.85		
						12	175	110.73	0.95		
						15	151	94.08	1.10		
						16	137	84.00	1.20		
						19	119	71.75	1.40		
						20	136	69.39	1.15	S-47	4P
						21	112	67.20	1.50	SA-F-47	4P
						22	126	63.80	1.25	SA-A-47	4P
						25	109	54.59	1.40	SA-A-F-47	4P
						29	96	47.32	1.60		
						31	90	44.22	1.75		
						36	78	38.23	2.0		
						42	67	32.48	2.3		
						48	60	29.00	2.6		
						56	52	24.77	3.0		</

输出转速 Output speed (r/min)	输出扭矩 Output torque (N. M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出扭矩 Output torque (N. M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole
0.37KW						0.55KW					
104	28	25.38	2.2			9.6	340	94.08	0.85		
118	25	22.50	2.3			11	305	84.00	0.95		
133	24	19.89	1.85			13	265	71.75	1.10	S-57	6P
145	22	18.24	2.0	S-37	2P	13	250	67.20	1.15	SA-F-57	6P
171	19	15.53	2.3	SA-F-37	2P	16	245	54.59	1.10	SA-A-57	6P
198	16	13.39	2.5	SA-A-37	2P	19	215	47.32	1.25	SA-A-F-57	6P
212	15	12.48	2.7	SA-A-F-37	2P	20	200	44.22	1.35		
243	13	10.91	3.0			24	176	38.23	1.55		
259	12	10.23	3.1								
294	11	9.02	3.3								
0.55KW											
1.0	2810	1332	1.90			8.6	370	158.12	0.80		
1.1	2540	1191	1.00			9.9	330	137.05	0.90		
1.3	2210	1032	1.15	S87-RF57	4P	11	310	128.10	0.95		
1.5	2040	930	1.25	SF87-RF57	4P	12	270	110.73	1.10		
1.6	1840	831	1.35	SA87-RF57	4P	14	235	94.08	1.25		
1.9	1600	719	1.55	SAF87-RF57	4P	16	210	84.00	1.40	S-57	4P
2.2	1400	624	1.80			19	184	71.75	1.55	SA-F-57	4P
2.4	1270	558	1.95			20	174	67.20	1.65	SA-A-57	4P
3.1	1010	435	2.4			25	167	54.59	1.45	SA-A-F-57	4P
						29	146	47.32	1.70		
2.7	1380	499	0.90			31	137	44.22	1.80		
3.1	1210	438	1.05	S77-RF37	4P	36	120	38.23	2.0		
3.5	1070	389	1.15	SF77-RF37	4P	42	103	32.48	2.4		
4.2	910	327	1.35	SA77-RF37	4P	47	92	29.00	2.7		
4.7	820	289	1.50	SAF77-RF37	4P	55	79	24.77	3.1		
5.4	710	250	1.75			59	75	23.20	3.3		
						67	69	20.33	2.4		
5.5	650	246	0.90	S67-RF37	4P						
6.2	580	221	1.00	SF67-RF37	4P	16	205	84.00	0.80		
6.9	530	198	1.10	SA67-RF37	4P	19	179	71.75	0.95		
8.1	455	168	1.25	SAF67-RF37	4P	20	169	67.20	1.00		
						25	165	54.59	0.95		
2.4	1450	288.00	1.70	S-87	8P	29	144	47.32	1.10		
2.6	1320	258.18	1.85	SA-F-87	8P	31	135	44.22	1.15	S-47	4P
3.1	1150	222.40	2.1	SA-A-87	8P	36	118	38.23	1.30	SA-F-47	4P
				SA-A-F-87	8P	42	101	32.48	1.55	SA-A-47	4P
						47	91	29.00	1.70	SA-A-F-47	4P
3.1	1130	288.00	2.2	S-87	6P	55	78	24.77	2.0		
3.5	1020	258.18	2.4	SA-F-87	6P	59	74	23.20	2.1		
4.1	900	222.40	2.7	SA-A-87	6P	67	69	20.33	1.30		
4.4	820	202.96	2.9	SA-A-F-87	6P	77	60	17.62	1.85		
						83	56	16.47	1.95		
3.0	1090	225.26	1.15	S-77	8P	96	49	14.24	2.2		
3.2	1040	214.00	1.20	SA-F-77	8P	112	42	12.10	2.6		
3.6	930	189.09	1.35	SA-A-77	8P	126	37	10.80	2.9		
4.2	810	161.60	1.55	SA-A-F-77	8P	147	32	9.23	3.4		
3.5	960	256.47	1.35	S-77	6P	44	94	30.68	0.80		
4.0	850	225.26	1.50	SA-F-77	6P	47	89	28.76	0.85		
4.2	810	214.00	1.55	SA-A-77	6P	54	79	25.38	0.95		
4.8	730	189.09	1.75	SA-A-F-77	6P	60	70	22.50	1.05	S-37	4P
5.6	635	161.60	2.0			71	60	19.13	1.20	SA-F-37	4P
						88	53	15.53	0.95	SA-A-37	4P
						102	46	13.39	1.10	SA-A-F-37	4P
						109	43	12.48	1.15		
5.3	660	256.47	1.90	S-77	4P	125	37	10.91	1.30		
6.0	590	225.26	2.2	SA-F-77	4P	133	35	10.23	1.35		
6.4	560	214.00	2.3	SA-A-77	4P	151	31	9.02	1.50		
7.2	505	189.09	2.5	SA-A-F-77	4P	170	28	8.00	1.60		
						200	24	6.80	1.80		
6.3	520	217.41	1.00								
7.2	465	190.11	1.10			94	46	28.76	1.40		
7.5	445	180.60	1.15			106	41	25.38	1.50		
8.6	395	158.45	1.30	S-67	4P	120	37	22.50	1.55	S-37	2P
10	340	134.40	1.55	SA-F-67	4P	136	34	19.89	1.30	SA-F-37	2P
11	310	121.33	1.65	SA-A-67	4P	148	32	18.24	1.40	SA-A-37	2P
13	275	106.75	1.85	SA-A-F-67	4P	174	27	15.53	1.55	SA-A-F-37	2P
13	265	100.80	1.95			202	24	13.39	1.75		
16	230	85.83	2.3			216	22	12.48	1.85		
18	230	75.06	2.1			248	19	10.91	2.0		
21	205	65.63	2.3								

输出转速 Output speed (r/min)	输出扭矩 Output torque (N. M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出扭矩 Output torque (N. M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole
0.55KW						0.75KW					
264	18	10.23	2.1	S-37	2P	10	460	134.40	1.15		
299	16	9.02	2.2	SA-F-37	2P	11	420	121.33	1.25		
338	14	8.00	2.5	SA-A-37	2P	13	375	106.75	1.40		
397	12	6.80	2.4	SA-A-F-37	2P	14	355	100.80	1.40	S-67	4P
0.75KW						16	305	85.83	1.70	SA-F-67	4P
1.1	4840	1223	0.85			18	310	75.06	1.55	SA-A-67	4P
1.3	4240	1070	1.00			21	275	65.63	1.75	SA-A-F-67	4P
1.5	3650	928	1.15	S97-RF57	4P	22	260	62.35	1.85		
1.7	3230	824	1.30	SF97-RF57	4P	25	230	54.70	2.1		
1.9	2300	714	1.85	SA97-RF57	4P	30	198	46.40	2.4		
2.2	2450	626	1.70	SAF97-RF57	4P						
2.6	2110	538	2.0			13	365	71.75	0.80	S-57	6P
2.8	1900	484	2.2			13	345	67.20	0.85	SA-F-57	6P
						16	295	56.61	1.00	SA-A-57	6P
						19	295	47.32	0.90	SA-A-F-57	6P
						20	275	44.22	1.00		
1.3	3030	1032	0.85			12	365	110.73	0.80		
1.5	2780	930	0.90			15	315	94.08	0.95		
1.7	2510	831	1.00	S87-RF57	4P	16	285	84.00	1.05		
1.9	2190	719	1.15	SF87-RF57	4P	19	250	71.75	1.15		
2.2	1920	624	1.30	SA87-RF57	4P	21	235	67.20	1.20		
2.5	1730	558	1.45	SAF87-RF57	4P	25	225	54.59	1.10		
3.2	1390	435	1.75			29	197	47.32	1.20	S-57	4P
4.3	1060	323	2.3			31	185	44.22	1.35	SA-F-57	4P
						36	167	38.23	1.50	SA-A-57	4P
4.2	1240	327	1.00	S77-RF37	4P	42	138	32.48	1.80	SA-A-F-57	4P
4.8	1110	289	1.10	SF77-RF37	4P	48	124	29.00	2.0		
5.5	960	250	1.30	SA77-RF37	4P	56	107	24.77	2.3		
6.3	850	219	1.45	SAF77-RF37	4P	59	100	23.20	2.5		
						68	93	20.33	1.80		
						78	81	17.62	2.1		
						84	76	16.47	2.2		
						97	66	14.24	2.6		
2.4	2040	286.40	2.1	S-97	8P	29	194	47.32	0.80		
2.6	1890	262.22	2.2	SA-F-97	8P	31	182	44.22	0.85		
3.0	1690	231.67	2.5	SA-A-97	8P	36	159	38.23	1.00		
				SA-A-F-97	8P	42	136	32.48	1.15		
						48	122	29.00	1.25		
						56	106	24.77	1.45		
						59	99	23.20	1.55	S-47	4P
						68	93	20.33	1.20	SA-F-47	4P
						78	81	17.62	1.35	SA-A-47	4P
						84	76	16.47	1.45	SA-A-F-47	4P
						97	66	14.24	1.65		
						114	56	12.10	1.95		
						128	50	10.80	2.2		
						150	43	9.23	2.5		
						160	41	8.64	2.7		
						190	34	7.28	3.0		
3.1	1540	288.00	1.60	S-87	6P	72	81	19.13	0.85		
3.5	1400	258.18	1.75	SA-F-87	6P	111	57	12.48	0.85	S-37	4P
4.1	1220	222.40	1.95	SA-A-87	6P	127	50	10.91	0.95	SA-F-37	4P
4.4	1120	202.96	2.1	SA-A-F-87	6P	135	47	10.23	1.00	SA-A-37	4P
						153	42	9.02	1.10	SA-A-F-37	4P
						173	37	8.00	1.20		
						203	32	6.80	1.35		
4.8	1050	288.00	2.2	S-87	4P	141	43	19.13	1.05		
5.3	950	258.18	2.4	SA-F-87	4P	174	37	15.53	1.15		
6.2	830	222.40	2.8	SA-A-87	4P	202	32	13.39	1.30	S-37	2P
6.8	765	202.96	3.0	SA-A-F-87	4P	216	30	12.48	1.35	SA-F-37	2P
						248	26	10.91	1.50	SA-A-37	2P
						264	25	10.23	1.55	SA-A-F-37	2P
						299	22	9.02	1.65		
						338	19	8.00	1.80		
						397	17	6.80	1.75		
4.0	1160	225.26	1.10	S-77	6P						
4.2	1110	214.00	1.15	SA-F-77	6P						
4.8	990	189.09	1.30	SA-A-77	6P						
5.6	860	161.60	1.45	SA-A-F-77	6P						
5.4	890	256.47	1.45								
6.1	790	225.26	1.60								
6.4	755	214.00	1.70	S-77	4P						
7.3	675	189.09	1.90	SA-F-77	4P						
8.5	585	161.60	2.2	SA-A-77	4P						
9.3	545	148.15	2.3	SA-A-F-77	4P						
11	480	130.00	2.5								
11	460	123.20	2.6								
13	405	107.83	2.9								
7.3	625	190.11	0.85	S-67	4P						
7.6	595	180.60	0.85	SA-F-67	4P						
8.7	530	158.45	1.00	SA-A-67	4P						
				SA-A-F-67	4P						

输出转速 Output speed (r/min)	输出扭矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出扭矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole
1.1KW						1.1KW					
1.7	4720	824	0.90			20	360	71.75	0.80		
2.0	3370	714	1.25	S97-RF57	4P	21	340	67.20	0.85		
2.2	3590	626	1.15	SF97-RF57	4P	25	290	56.61	0.90		
2.6	3090	538	1.35	SA97-RF57	4P	30	285	47.32	0.85		
2.9	2790	484	1.50	SAF97-RF57	4P	32	265	44.22	0.90		
3.3	2430	420	1.75			37	235	38.23	1.05		
						43	200	32.48	1.25	S-57	4P
2.2	2820	624	0.90			48	179	29.00	1.35	SA-F-57	4P
2.5	2550	558	1.00			57	154	24.77	1.60	SA-A-57	4P
2.9	2240	485	1.10			60	145	23.20	1.70	SA-A-F-57	4P
3.2	2040	435	1.20	S87-RF57	4P	72	123	19.45	1.75		
3.7	1790	378	1.35	SF87-RF57	4P	79	117	17.62	1.45		
4.3	1560	323	1.55	SA87-RF57	4P	85	110	16.47	1.55		
5.0	1370	281	1.75	SAF87-RF57	4P	98	95	14.24	1.75		
5.5	1460	255	1.35			116	82	12.10	2.1		
6.3	1280	222	1.55			130	73	10.80	2.3		
6.8	1200	205	1.65			152	63	9.23	2.7		
6.4						6.4					
	1240	219	1.00	S77-RF37	4P	48	177	29.00	0.90		
				SF77-RF37	4P	57	153	24.77	1.00		
				SA77-RF37	4P	60	143	23.20	1.05		
				SAF77-RF37	4P	72	122	19.54	1.20	S-47	4P
2.4	3030	286.40	1.40	S-97	8P	79	117	17.62	0.95	SA-F-47	4P
2.6	2800	262.22	1.50	SA-F-97	8P	85	109	16.47	1.00	SA-A-47	4P
2.9	2500	231.67	1.70	SA-A-97	8P	98	95	14.24	1.15	SA-A-F-47	4P
3.5	2160	196.52	1.95	SA-A-F-97	8P	116	81	12.10	1.35		
						130	73	10.80	1.50		
3.2	2310	286.40	1.80	S-97	6P	152	63	9.23	1.75		
3.5	2130	262.22	1.95	SA-F-97	6P	162	59	8.64	1.85		
4.0	1900	231.67	2.2	SA-A-97	6P	192	50	7.28	2.1		
				SA-A-F-97	6P						
3.2	2220	288.00	1.10	S-87	6P					S-37	4P
3.6	2010	258.18	1.20	SA-F-87	6P	175	54	8.00	0.85	SA-F-37	4P
4.1	1760	222.40	1.35	SA-A-87	6P	206	46	6.80	0.95	SA-A-37	4P
4.5	1620	202.96	1.45	SA-A-F-87	6P					SA-A-F-37	4P
4.9	1520	288.00	1.50			202	47	13.39	0.85		
5.4	1370	228.18	1.65	S-87	4P	216	44	12.48	0.90	S-37	2P
6.3	1200	222.40	1.90	SA-F-87	4P	248	39	10.91	1.00	SA-F-37	2P
6.9	1100	202.96	2.0	SA-A-87	4P	264	36	10.23	1.05	SA-A-37	2P
7.8	990	180.00	2.2	SA-A-F-87	4P	299	32	9.02	1.10	SA-A-F-37	2P
9.2	840	151.30	2.5			338	28	8.00	1.25		
						397	24	6.80	1.20		
1.5KW						1.5KW					
6.2	1150	225.26	1.10			2.0	4590	714	0.90		
6.5	1100	214.00	1.15			2.2	4890	626	0.85		
7.4	980	189.09	1.30			2.6	4220	538	1.00	S97-RF57	4P
8.7	850	161.60	1.50	S-77	4P	2.9	3810	484	1.10	SF97-RF57	4P
9.4	785	148.15	1.60	SA-F-77	4P	3.4	3310	420	1.25	SA97-RF57	4P
11	695	130.00	1.75	SA-A-77	4P	3.8	2990	376	1.40	SAF97-RF57	4P
11	665	123.20	1.80	SA-A-F-77	4P	4.3	2630	327	1.60		
13	585	107.83	2.0								
14	535	97.14	2.1			2.9	3060	485	0.80		
16	470	85.22	2.3			3.2	2780	435	0.90		
						3.7	2450	378	1.00	S87-RF57	4P
12	605	121.33	0.85			4.4	2130	323	1.15	SF87-RF57	4P
13	540	106.75	0.95			5.0	1870	281	1.30	SA87-RF57	4P
14	515	100.80	1.00			5.5	2000	255	1.00	SAF87-RF57	4P
16	445	85.83	1.15			6.3	1750	222	1.15		
18	405	78.00	1.30	S-67	4P	6.9	1630	205	1.20		
21	400	65.63	1.20	SA-F-67	4P						
22	380	62.35	1.25	SA-A-67	4P	2.4	4030	286.40	1.05	S-97	8P
26	335	54.70	1.45	SA-A-F-67	4P	2.7	3720	262.22	1.15	SA-F-97	8P
30	285	46.40	1.65			3.0	3330	231.67	1.25	SA-A-97	8P
33	260	41.89	1.85			3.6	2870	196.52	1.45	SA-A-F-97	8P
38	230	36.85	2.1								
40	220	34.80	2.2								
47	187	29.63	2.6								





输出转速 Output speed (r/min)	输出扭矩 Output torque (N. M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出扭矩 Output torque (N. M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole	
1. 5KW						1. 5KW						
3. 2	3150	286. 40	1. 35	S-97	6P	99	129	14. 24	1. 30	S-57	4P	
3. 5	2910	262. 22	1. 45	SA-F-97	6P	117	110	12. 10	1. 55	SA-F-57	4P	
4. 0	2600	231. 67	1. 60	SA-A-97	6P	131	99	10. 80	1. 70	SA-A-57	4P	
4. 7	2230	196. 52	1. 90	SA-A-F-97	6P	153	85	9. 23	2. 0	SA-A-F-57	4P	
4. 9	2130	286. 40	1. 90	S-97	4P	99	129	14. 24	0. 85	S-47	4P	
5. 4	1970	262. 22	2. 0	SA-F-97	4P	117	110	12. 10	1. 00		4P	
6. 1	1760	231. 67	2. 3	SA-A-97	4P	131	99	10. 80	1. 10		SA-F-47	4P
7. 2	1510	196. 52	2. 7	SA-A-F-97	4P	153	85	9. 23	1. 30		SA-A-47	4P
						163	79	8. 64	1. 35		SA-A-F-47	4P
3. 6	2740	258. 18	0. 90	S-87	6P	194	67	7. 28	1. 55	S-37	2P	
4. 1	2390	222. 40	1. 00	SA-F-87	6P	299	44	9. 02	0. 85		SA-F-37	2P
4. 5	2200	202. 96	1. 10	SA-A-87	6P	338	39	8. 00	0. 90		SA-A-37	2P
5. 1	1980	180. 00	1. 20	SA-A-F-87	6P	397	33	6. 80	0. 90		SA-A-F-37	2P
4. 9	2060	288. 00	1. 10	S-87	4P	2. 2KW						
5. 5	1860	258. 18	1. 20			3. 4	4900	420	0. 85	S97-RF57	4P	
6. 3	1630	222. 40	1. 40			3. 8	4410	376	0. 95	SF97-RF57	4P	
6. 9	1500	202. 96	1. 50			4. 3	3870	327	1. 10	SA97-RF57	4P	
7. 8	1340	180. 00	1. 65			4. 9	3420	287	1. 25	SAF97-RF57	4P	
9. 3	1140	151. 30	1. 90			5. 6	3000	252	1. 40			
10	1060	139. 05	2. 0			3. 3	4530	286. 40	0. 95	S-97	6P	
11	950	123. 48	2. 2			3. 6	4180	262. 22	1. 00	SA-F-97	6P	
13	850	110. 40	2. 3	4. 1	3730	231. 67	1. 15	S-A-97	6P			
14	770	99. 26	2. 5	4. 8	3210	196. 52	1. 30	SA-A-F-97	6P			
7. 5	1330	189. 09	0. 95	S-77	4P	4. 9	3130	286. 40	1. 30	S-97	4P	
8. 7	1150	161. 60	1. 10			5. 4	2890	262. 22	1. 40		4P	
9. 5	1060	148. 15	1. 15			6. 1	2570	231. 67	1. 55		4P	
11	940	130. 00	1. 30			7. 2	2210	196. 52	1. 80		4P	
11	900	123. 20	1. 35			7. 8	2050	180. 95	1. 90		SA-F-97	4P
13	795	107. 83	1. 45			8. 7	1840	161. 74	2. 1		SA-A-97	4P
15	725	97. 14	1. 60			9. 7	1670	145. 60	2. 2		SA-A-F-97	4P
17	640	85. 22	1. 70			11	1520	131. 85	2. 4			
19	650	75. 09	1. 70			12	1360	116. 92	2. 6			
20	620	71. 33	1. 80			13	1240	105. 71	2. 8			
21	510	66. 67	2. 0			16	1060	89. 60	3. 1			
22	550	63. 03	2. 0			5. 5	2730	258. 18	0. 85	S-87	4P	
25	440	56. 92	2. 3			6. 3	2380	222. 40	0. 95			
26	470	53. 87	2. 3			6. 9	2190	202. 96	1. 05			
29	435	49. 38	2. 5			7. 8	1970	180. 00	1. 10			
33	385	43. 33	2. 9			9. 3	1680	151. 30	1. 30			
16	600	85. 83	0. 85			10	1550	139. 05	1. 35			
18	550	78. 00	0. 95	11	1390	123. 48	1. 50					
21	540	65. 63	0. 90	13	1250	110. 40	1. 60					
23	515	62. 35	1. 95	14	1130	99. 26	1. 75					
26	455	54. 70	1. 05	16	1030	86. 15	1. 90					
30	390	46. 40	1. 25	17	990	81. 76	1. 50					
34	355	41. 89	1. 36	18	890	77. 14	2. 0					
38	310	36. 85	1. 55	20	920	70. 43	1. 75					
41	295	34. 80	1. 60	22	840	64. 27	1. 90					
48	255	29. 63	1. 90	25	750	57. 00	2. 1					
52	230	26. 93	2. 1	11	1390	130. 00	0. 85	S-77	4P			
58	220	24. 44	1. 55	11	1320	123. 20	0. 90					
61	210	23. 22	1. 60	13	1170	107. 83	1. 00					
69	186	20. 37	1. 85	15	1060	97. 14	1. 10					
82	159	17. 28	2. 1	17	940	85. 22	1. 15					
90	144	15. 60	2. 4	19	840	75. 20	1. 30					
103	127	13. 73	2. 7	21	745	66. 67	1. 40					
43	270	32. 48	0. 90	22	810	63. 03	1. 35					
49	245	29. 00	1. 00	25	645	56. 92	1. 55					
57	210	24. 77	1. 15	26	695	53. 87	1. 60					
61	196	23. 20	1. 25	29	635	49. 38	1. 75					
72	167	19. 54	1. 30	33	560	43. 33	1. 95					
80	159	17. 62	1. 05	34	535	41. 07	2. 1					
86	149	16. 47	1. 15									

输出转速 Output speed (r/min)	输出扭矩 Output torque (N. M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出扭矩 Output torque (N. M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole							
2. 2KW						3. 0KW												
39	470	35. 94	2. 3	S-77 SA-F-77 SA-A-77 SA-A-F-77	4P	16	1290	85. 22	0. 85	S-77 SA-F-77 SA-A-77 SA-A-F-77	4P							
44	425	32. 38	2. 6			19	1150	75. 20	0. 95									
50	375	28. 41	2. 8			21	1020	66. 67	1. 00									
56	330	25. 07	3. 1			22	1110	63. 03	1. 00									
62	310	22. 89	2. 3			25	880	56. 92	1. 10									
67	285	20. 99	2. 5	26	950	53. 87	1. 15	28	880			49. 39	1. 25					
30 34 38 41 18 52 60 69 82 90 103 109 128 141 162	570	46. 40	0. 85	S-67 SA-F-67 SA-A-67 SA-A-F-67	4P	32	770	43. 33	1. 40									
	515	41. 89	0. 95			34	735	41. 07	1. 50									
	460	36. 85	1. 05			39	645	35. 94	1. 70									
	435	34. 80	1. 10			43	585	32. 38	1. 85									
	370	29. 63	1. 30			49	515	28. 41	2. 0									
	340	26. 93	1. 40			56	455	25. 07	2. 2									
	295	23. 33	1. 60			61	430	22. 89	1. 65									
	275	20. 37	1. 25			67	395	20. 99	1. 80									
	235	17. 28	1. 45			76	345	18. 42	2. 0									
	210	15. 60	1. 60			80	330	17. 45	2. 2									
	186	13. 73	1. 85			92	290	15. 28	2. 5									
	176	12. 96	1. 95			102	260	13. 73	2. 7									
	151	11. 03	2. 3			116	230	12. 07	3. 1									
	137	10. 03	2. 5			131	205	10. 65	3. 5									
	119	8. 69	2. 8															
	99 117 131 153 163 194	190	14. 24			0. 90	S-57 SA-F-57 SA-A-57 SA-A-F-57	4P	40					595	34. 80	0. 80	S-67 SA-F-67 SA-A-67 SA-A-F-67	4P
		162	12. 10			1. 05			47					510	29. 63	0. 95		
145		10. 80	1. 15	52	465	26. 93			1. 05									
124		9. 23	1. 35	60	405	23. 33			1. 20									
117		8. 64	1. 40	69	375	20. 37			0. 90									
99		7. 28	1. 50	81	320	17. 28			1. 05									
3. 0KW	4710 4140 3620 3400	287 252 219 205	0. 90 1. 00 1. 15 1. 25	S97 -RF57 SF97 -RF57 SA97 -RF57 SAF97-RF57	4P 4P 4P 4P	90	290	15. 60	1. 15									
						102	255	13. 73	1. 35									
						108	240	12. 96	1. 40									
						127	205	11. 03	1. 65									
						140	188	10. 03	1. 80									
						161	164	8. 69	2. 0									
						185	143	7. 56	2. 1									
						4. 9 5. 3 6. 0 7. 1 7. 7 8. 7 9. 6 11 12 13 16 17	4290 3960 3530 3040 2810 2530 2300 2090 1870 1700 1450 1470	286. 40 262. 22 231. 67 196. 52 180. 95 161. 74 145. 60 131. 85 116. 92 105. 71 89. 60 80. 85	0. 95 1. 00 1. 15 1. 30 1. 40 1. 50 1. 65 1. 75 1. 90 2. 0 2. 2 2. 2	S-97 SA-F-97 SA-A-97 SA-A-F-97	4P 4P 4P 4P	130	199	10. 80	0. 85	S-57		
152	171	9. 23	1. 00	SA-F-57	4P													
162	160	8. 64	1. 05	SA-A-57	4P													
192	136	7. 28	1. 10	SA-A-F-57	4P													
4. 0KW												S97 -RF57 SF97 -RF57 SA97 -RF57 SAF97-RF57	4P 4P 4P 4P					
6. 5	4780	219	0. 90	S-97	4P													
6. 9	4490	205	0. 95	SA-F-97	4P													
6. 1	4650	231. 67	0. 85	SA-A-97	4P													
7. 2	3990	196. 52	1. 00	SA-A-F-97	4P													
7. 8	3700	180. 95	1. 05															
8. 8	3330	161. 74	1. 15															
9. 8	3020	145. 60	1. 25															
7. 8 9. 2 10 11 13 14 16 17 18 20 22 25 29 32 36 40	2700 2300 2130 1900 1720 1550 1360 1460 1230 1260 1160 1030 870 800 715 640	180. 00 151. 30 139. 05 123. 48 110. 40 99. 26 86. 15 81. 76 77. 14 70. 43 64. 27 57. 00 47. 91 44. 03 39. 10 34. 96	0. 80 0. 95 1. 00 1. 10 1. 15 1. 25 1. 40 1. 55 1. 85 2. 0 2. 2 2. 5	S-87 SA-F-87 SA-A-87 SA-A-F-87	4P 4P 4P 4P	11	1900	123. 48	1. 10	S-87	4P							
						13	1720	110. 40	1. 15	SA-F-87	4P							
						14	1550	99. 26	1. 25	SA-A-87	4P							
						16	1360	86. 15	1. 40	SA-A-F-87	4P							
						17	1460	81. 76	1. 10									
						18	1230	77. 14	1. 50									
						20	1260	70. 43	1. 25									
						22	1160	64. 27	1. 40									
						25	1030	57. 00	1. 55									
						29	870	47. 91	1. 85									
						32	800	44. 03	2. 0									
						36	715	39. 10	2. 2									
						40	640	34. 96	2. 5									



输出转速 Output speed (r/min)	输出扭矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出扭矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole
4.0KW						5.5KW					
32	1060	44.03	1.05			35	1320	41.07	0.85		
36	940	39.10	1.70	S-87	4P	40	1160	35.94	0.95		
41	840	34.96	1.90	SA-F-87	4P	44	1050	32.38	1.05		
45	760	31.43	2.1	SA-A-87	4P	50	920	28.41	1.15		
52	665	27.28	2.4	SA-A-F-87	4P	57	820	25.07	1.25		
56	635	25.50	1.95			64	125	22.22	1.35	S-77	4P
						78	625	18.41	1.15	SA-F-77	4P
25	1160	56.92	0.85			82	590	17.45	1.20	SA-A-77	4P
26	1250	53.87	0.90			94	520	15.28	1.35	SA-A-F-77	4P
29	1150	49.38	0.95			104	470	13.76	1.50		
33	1020	43.33	1.10			118	410	12.07	1.75		
35	960	41.07	1.15			134	365	10.65	2.0		
40	850	35.94	1.30			151	325	9.44	2.2		
44	765	32.38	1.40	S-77	4P	177	275	8.06	2.5		
50	675	28.41	1.55	SA-F-77	4P						
57	600	25.07	1.70	SA-A-77	4P	130	370	11.03	0.90	S-67	4P
62	565	22.89	1.25	SA-A-F-77	4P	143	340	10.03	1.00	SA-F-67	4P
68	520	20.99	1.35			165	295	8.69	1.15	SA-A-67	4P
77	455	18.42	1.55			189	255	7.56	1.15	SA-A-F-67	4P
81	435	17.45	1.65								
93	380	15.28	1.85								
103	345	13.76	2.1								
118	300	12.07	2.4								
133	265	10.65	2.7								
150	235	9.44	3.1								
176	205	8.06	3.3								
82	420	17.28	0.80								
91	380	15.60	0.90								
103	335	13.73	1.00	S-67	4P						
110	320	12.96	1.05	SA-F-67	4P						
129	270	11.03	1.25	SA-A-67	4P						
142	245	10.03	1.35	SA-A-F-67	4P						
163	215	8.69	1.55								
188	188	7.56	1.55								
5.5KW						7.5KW					
8.8	4550	161.74	0.85			14	4160	105.71	0.85		
9.8	4130	145.60	0.90			16	3560	89.60	0.90		
11	3760	131.85	0.95			18	3130	78.26	1.00		
12	3360	116.92	1.05			20	3200	71.43	1.05		
14	3050	105.71	1.15	S-97	4P	22	2630	65.45	1.10		
16	2610	89.60	1.25	SA-F-97	4P	24	2730	60.59	1.20	S-97	4P
18	2290	78.26	1.35	SA-A-97	4P	26	2520	55.79	1.30	SA-F-97	4P
20	2350	71.43	1.40	SA-A-F-97	4P	29	2260	49.87	1.45	SA-A-97	4P
22	1930	65.45	1.50			32	2040	44.89	1.60	SA-A-F-97	4P
24	2000	60.59	1.65			35	1850	40.65	1.80		
26	1850	55.79	1.80			40	1650	36.05	2.0		
29	1660	49.87	2.0			44	1490	32.60	2.2		
32	1500	44.89	2.2			54	1240	26.39	2.1		
35	1360	40.65	2.4			61	1110	23.59	2.3		
						67	1000	21.23	2.6		
19	2200	77.14	0.85			74	910	19.23	2.9		
22	1850	64.00	0.90								
25	1850	57.00	1.85			32	1970	44.03	0.80		
30	1560	47.91	1.00			37	1750	39.10	0.90		
32	1440	44.03	1.10			41	1570	34.96	1.00		
37	1280	39.10	1.25	S-87	4P	45	1420	31.43	1.15		
41	1150	34.96	1.40	SA-F-87	4P	52	1230	27.28	1.30	S-87	4P
45	1040	31.43	1.55	SA-A-87	4P	56	1180	25.50	1.05	SA-F-87	4P
52	910	27.28	1.75	SA-A-F-87	4P	67	1000	21.43	1.25	SA-A-87	4P
56	870	25.50	1.45			73	920	19.70	1.35	SA-A-F-87	4P
67	730	21.43	1.70			82	820	17.49	1.50		
73	675	19.70	1.85			91	730	15.64	1.70		
82	600	17.49	2.1			102	660	14.06	1.90		
91	535	15.64	2.3			117	676	12.21	2.2		
102	485	14.06	2.6			131	616	10.93	2.4		
117	420	12.21	3.0			158	430	9.07	2.7		
131	375	10.93	3.3			181	375	7.88	2.7		
						50	1260	28.41	0.85		
						57	1110	25.07	0.90		
						64	990	22.22	1.00		
						78	850	18.42	0.85	S-77	4P
						82	810	17.45	0.90	SA-F-77	4P
						94	705	15.28	1.00	SA-A-77	4P
						104	640	13.76	1.10	SA-A-F-77	4P
						118	650	12.07	1.30		
						134	495	10.65	1.45		
						151	440	9.44	1.65		
						177	380	8.06	1.80		

输出转速 Output speed (r/min)	输出扭矩 Output torque (N. M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出扭矩 Output torque (N. M)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机级数 Motor pole
11. 0KW						22KW					
26	3670	55.79	0.90			53	3630	27.63	0.85		
29	3290	49.87	1.00			61	3180	24.13	0.90		
32	2970	44.89	1.10			69	2870	21.23	0.90		
35	2700	40.65	1.20			76	2600	19.23	1.00	S-97	4P
40	3400	36.05	1.40	S-97	4P	86	2310	17.05	1.10	SA-F-97	4P
44	2170	32.60	1.45	SA-S-97	4P	95	2090	15.42	1.20	SA-A-97	4P
55	1810	26.39	1.45	SA-A-97	4P	112	1780	13.07	1.30	SA-A-F-97	4P
61	1620	23.59	1.60	SA-A-F-97	4P	128	1560	11.41	1.40		
68	1460	21.23	1.80			153	1300	9.55	1.55		
75	1320	19.23	1.95			177	1130	8.26	1.55		
84	1180	17.05	2.2								
93	1070	15.42	2.3								
110	900	13.07	2.6								
126	790	11.41	2.8								
53	1800	27.28	0.90								
59	1610	24.43	1.00								
71	1340	20.27	1.20								
73	1340	19.70	0.95								
82	1190	17.49	1.05	S-87	4P						
92	1070	15.64	1.15	SA-F-87	4P						
102	960	14.06	1.30	SA-A-87	4P						
118	840	12.21	1.50	SA-A-F-87	4P						
132	750	10.93	1.65								
159	625	9.07	1.85								
183	545	7.88	1.85								
15. 0KW											
33	4000	44.89	0.85								
36	3630	40.65	0.90								
41	3230	36.05	1.00								
45	2920	32.60	1.10								
55	2430	26.39	1.05								
62	2180	23.59	1.20	S-97	4P						
65	1970	21.23	1.30	SA-F-97	4P						
76	1780	19.23	1.45	SA-A-97	4P						
86	1580	17.05	1.60	SA-A-F-97	4P						
95	1430	15.42	1.70								
112	1220	1.307	1.90								
128	1030	11.41	2.1								
153	890	9.55	2.3								
177	775	8.26	2.3								
93	1430	15.64	0.85								
104	1290	14.06	0.95	S-87	4P						
120	1120	12.21	1.10	SA-F-87	4P						
134	1010	10.93	1.25	SA-A-87	4P						
161	840	9.07	1.35	SA-A-F-87	4P						
185	730	7.88	1.40								
18. 5KW											
41	3970	36.05	0.85								
45	3590	32.60	0.90								
53	3060	27.63	1.00								
61	2680	24.13	1.05	S-97	4P						
69	2420	21.23	1.10	SA-F-97	4P						
76	2190	19.23	1.20	SA-A-97	4P						
86	1950	17.05	1.30	SA-A-F-97	4P						
95	1760	15.42	1.40								
112	1500	13.07	1.55								
128	1310	11.41	1.70								
153	1100	9.55	1.85								
177	950	8.26	1.85								







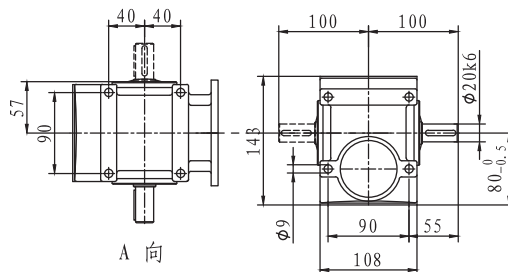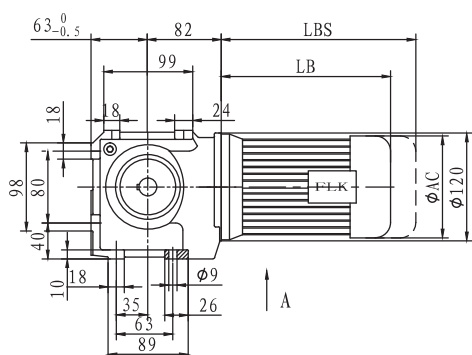

S-37

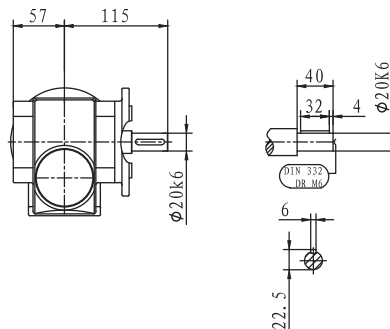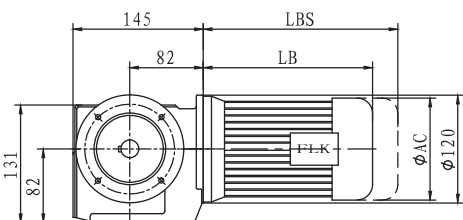




SA-F-37
($\phi 120/\phi 160$)

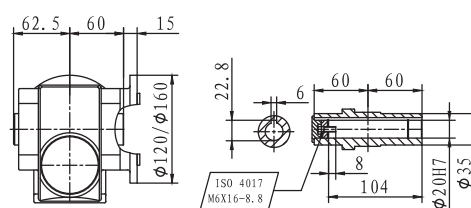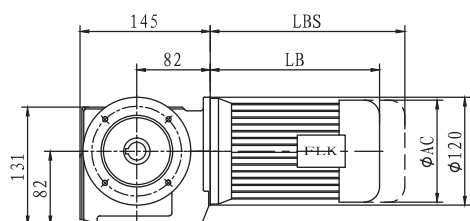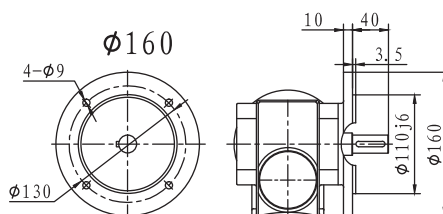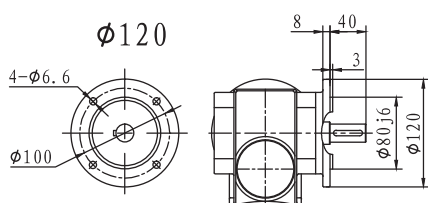





SA-A-F-37






未标注尺寸可相互参照

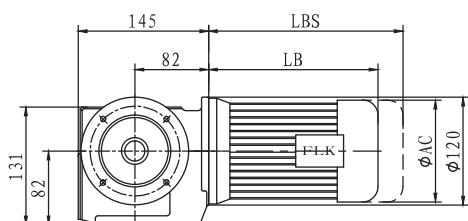




SA-H-F-37

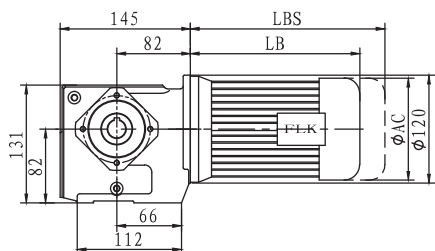

SA-A-37

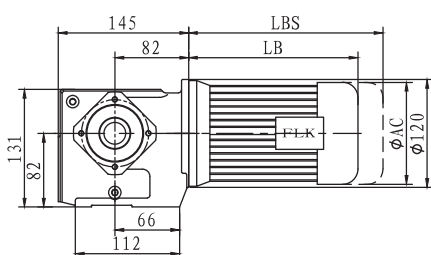

SA-H-37



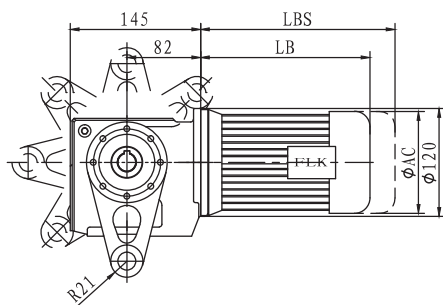


SA-A-T-37






未标注尺寸可相互参照




S

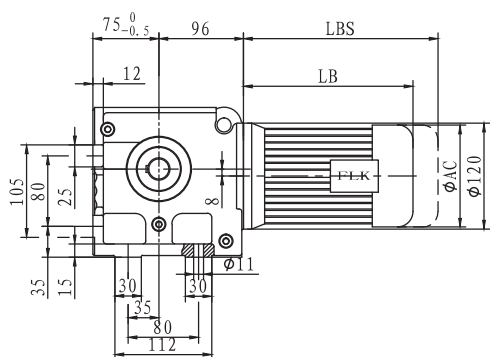




S-47

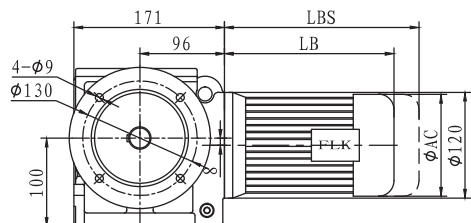


SA-F-47

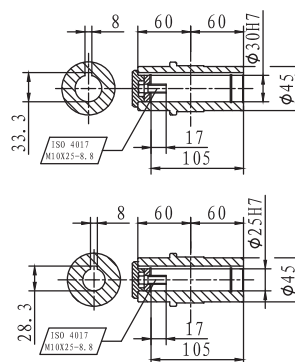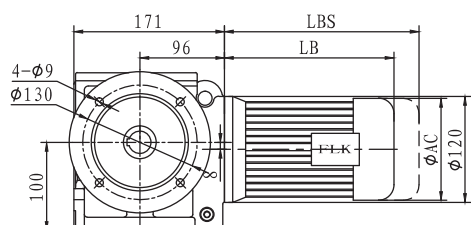




SA-A-F-47
($\phi 30/\phi 25$)

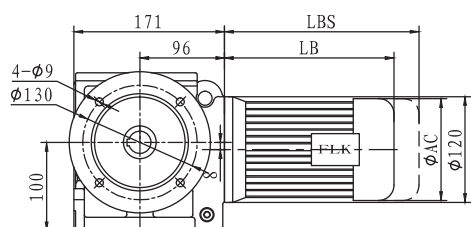








SA-H-F-47






未标注尺寸可相互参照

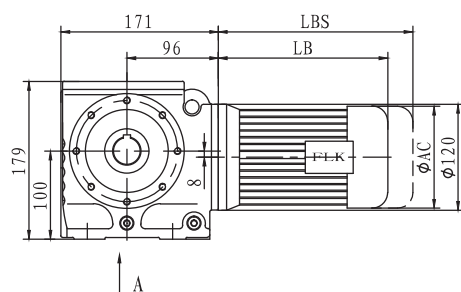


SA-A-47
($\phi 30/\phi 25$)

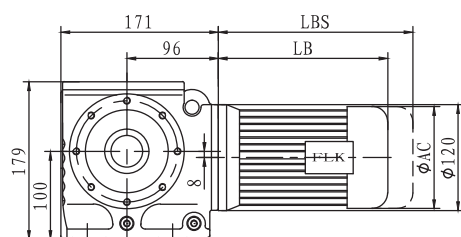





SA-H-47

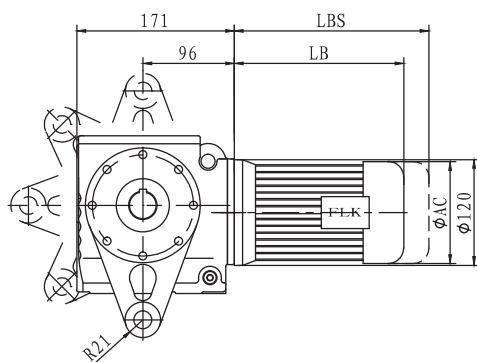




SA-A-T-47
($\phi 30/\phi 25$)







未标注尺寸可相互参照

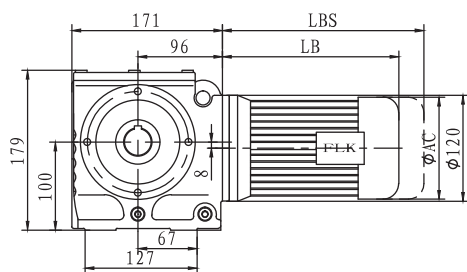




SA-A-Z-47
($\phi 30/\phi 25$)

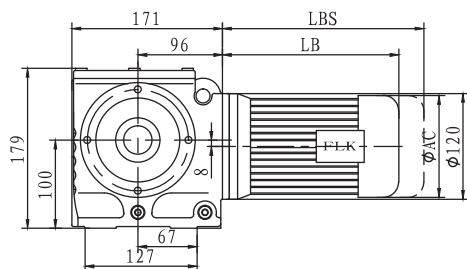

SA-H-Z-47

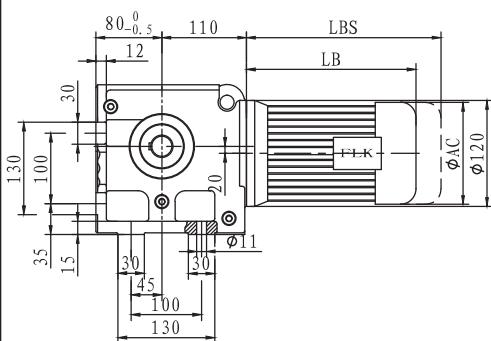



S-57

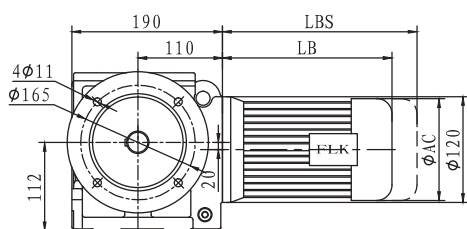





SA-F-57






未标注尺寸可相互参照

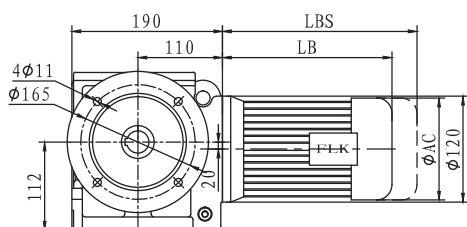


SA-A-F-57
(φ35/φ30)

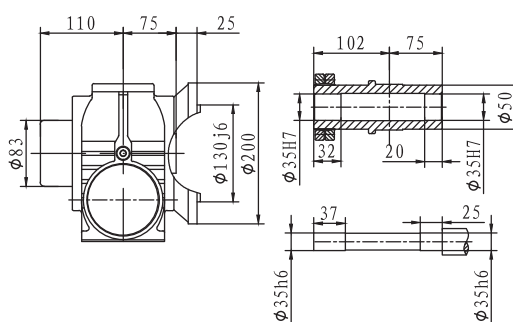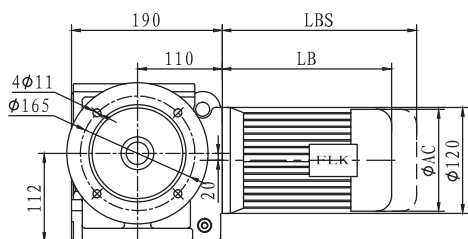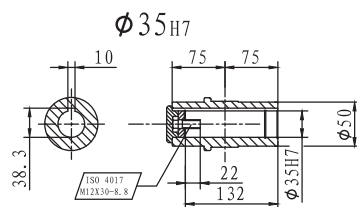




SA-H-F-57

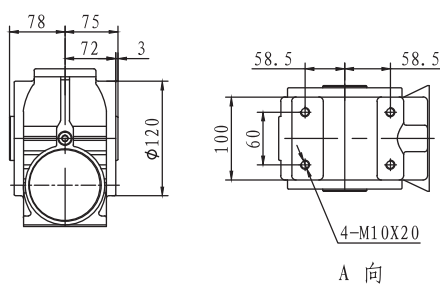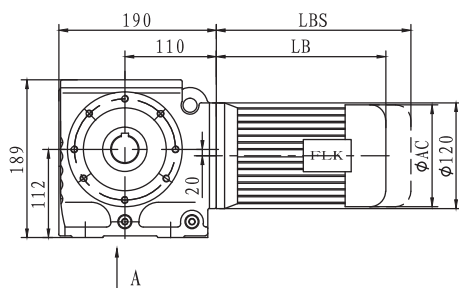




SA-A-57
(φ35/φ30)






未标注尺寸可相互参照

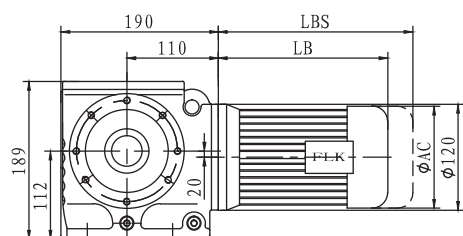




SA-H-57

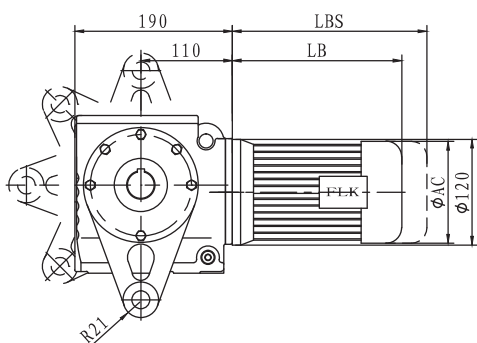

SA-A-T-57
($\phi 35/\phi 30$)

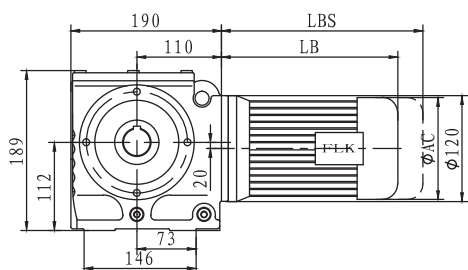




SA-A-Z-57
($\phi 35/\phi 30$)

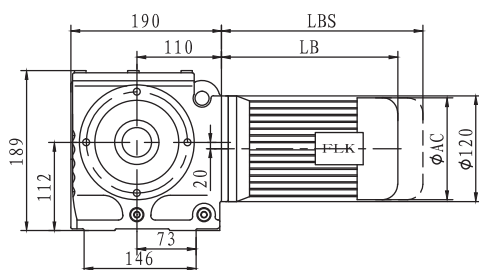




SA-H-Z-57





未标注尺寸可相互参照

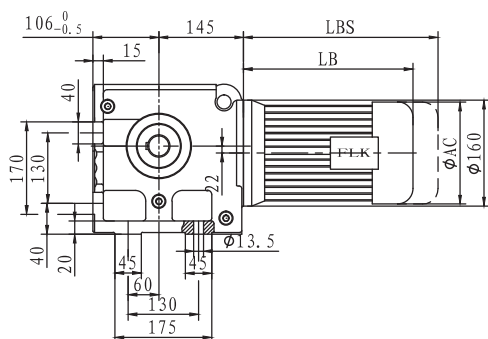



S-67

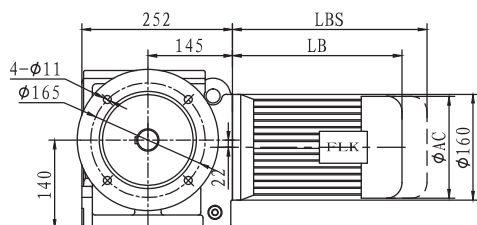



SA-F-67

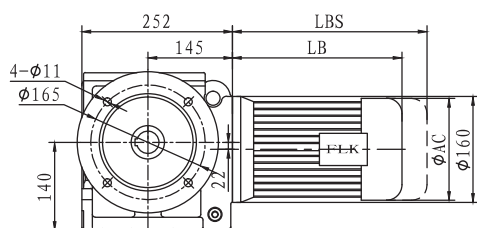




SA-A-F-67
($\phi 45/\phi 40$)





未标注尺寸可相互参照

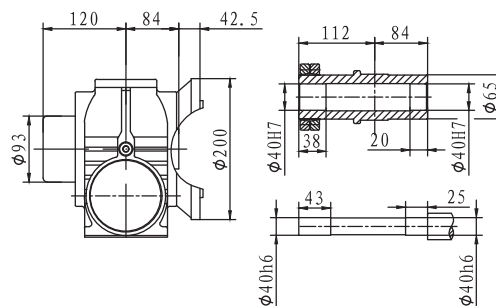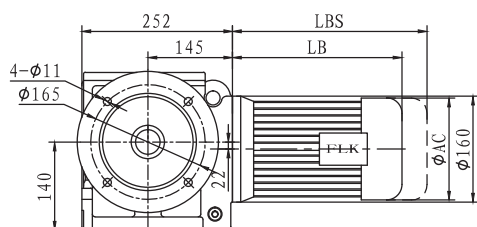



SA-H-F-67

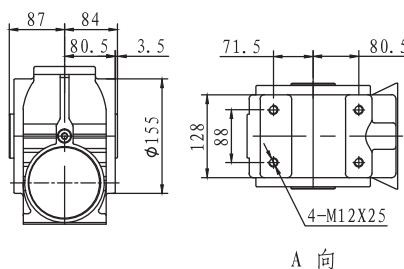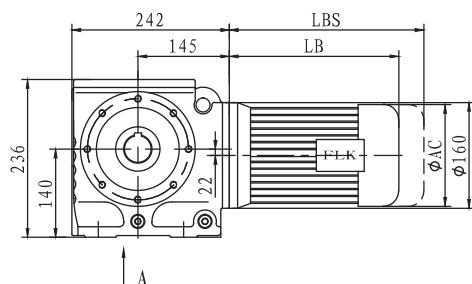

SA-A-67
(φ45/φ40)

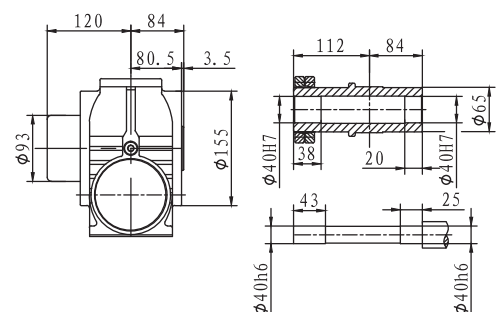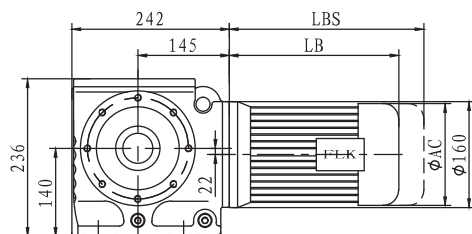





SA-H-67

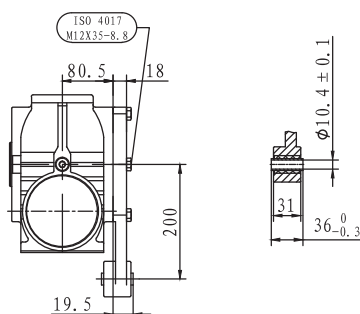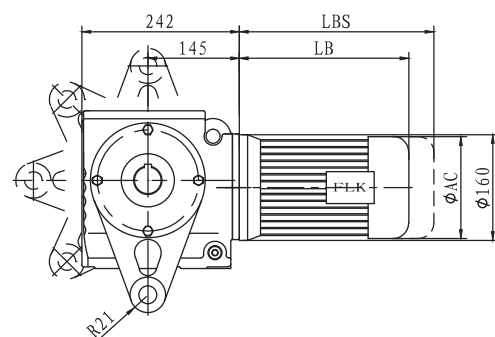




SA-A-T-67
(φ45/φ40)






未标注尺寸可相互参照

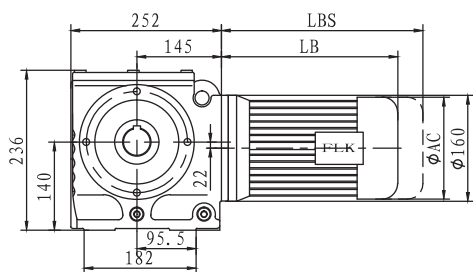




SA-A-Z-67
($\phi 45/\phi 40$)

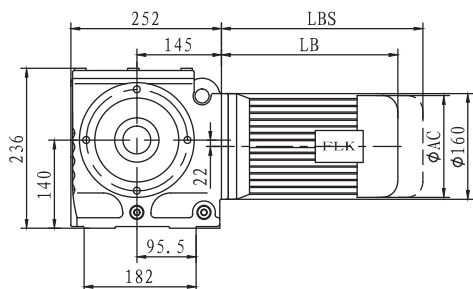

SA-H-Z-67

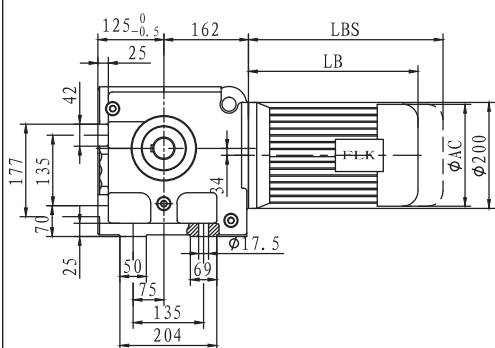

S-77


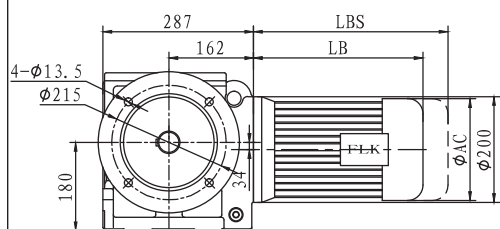


SA-F-77







未标注尺寸可相互参照




S

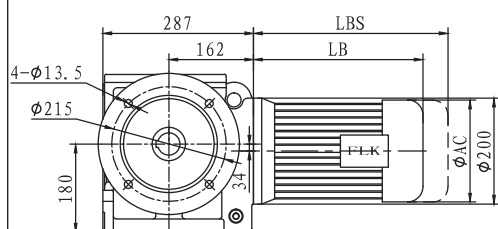

SA-A-F-77
($\phi 60/\phi 50$)

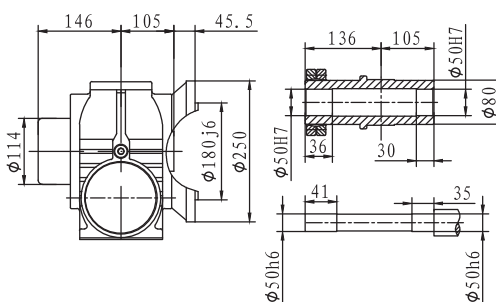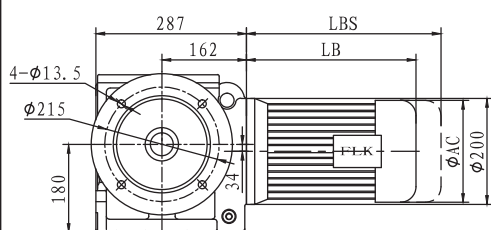




SA-H-F-77

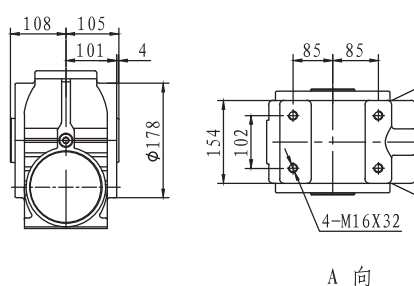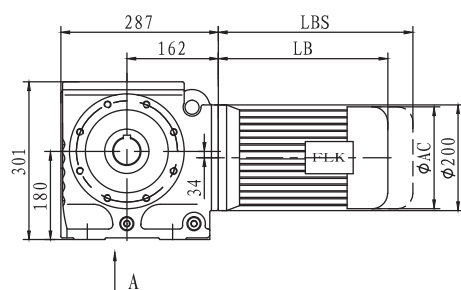





SA-A-77
($\phi 60/\phi 50$)







未标注尺寸可相互参照

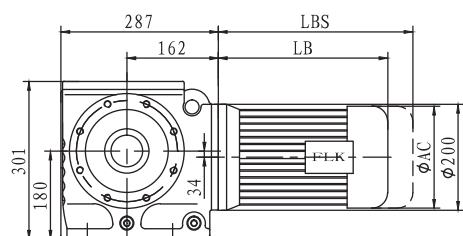




SA-H-77

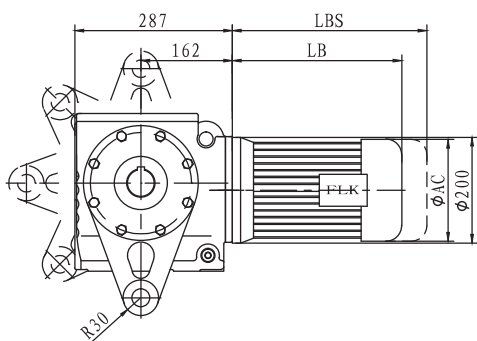


SA-A-T-77
($\phi 60/\phi 50$)

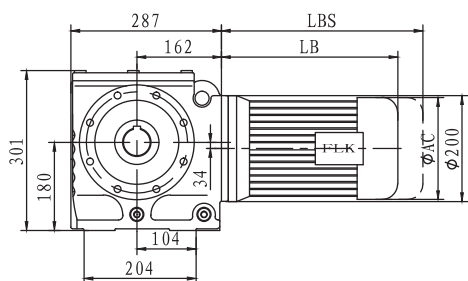

SA-A-Z-77
($\phi 60/\phi 50$)



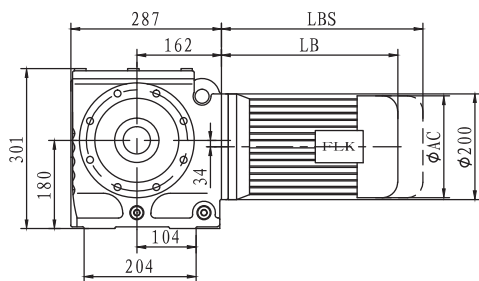


SA-H-Z-77






未标注尺寸可相互参照



S

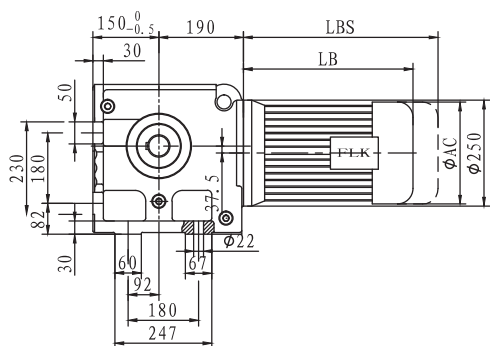




S-87

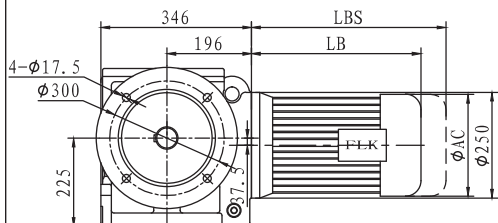



SA-F-87

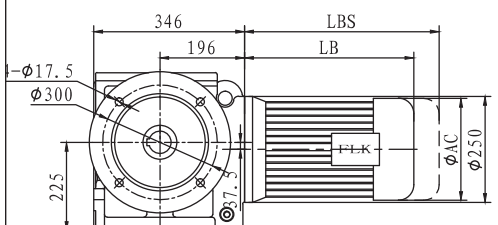




SA-A-F-87
($\phi 70/\phi 60$)





未标注尺寸可相互参照

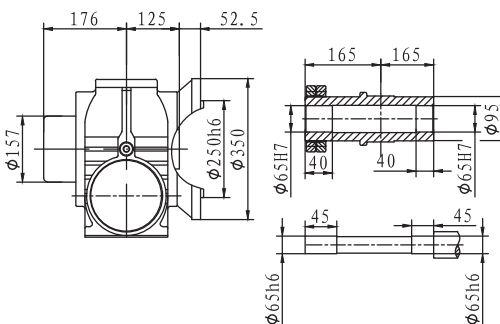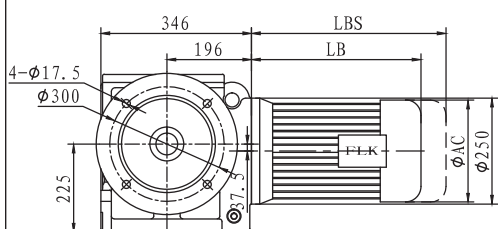



SA-H-F-87

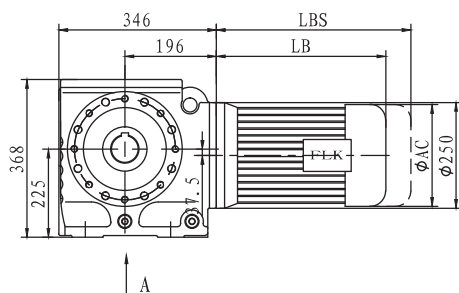


SA-A-87
(φ70/φ60)

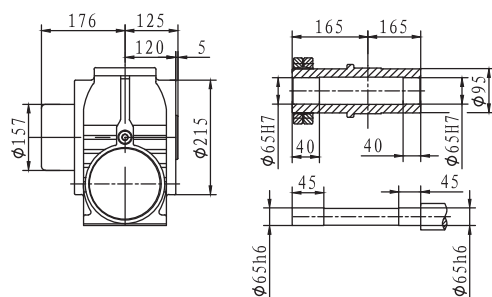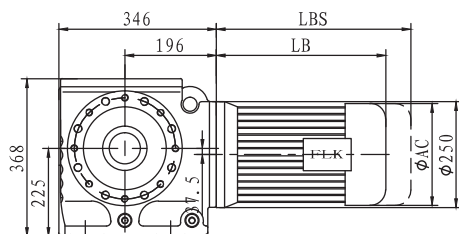




SA-H-87

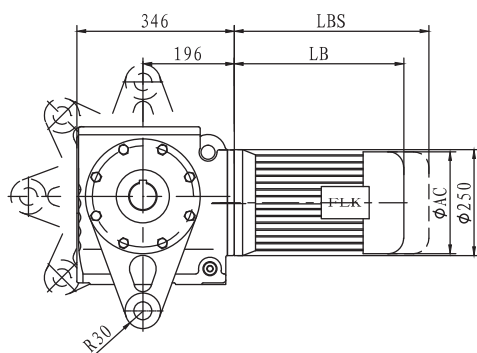





SA-A-T-87
(φ70/φ60)







未标注尺寸可相互参照

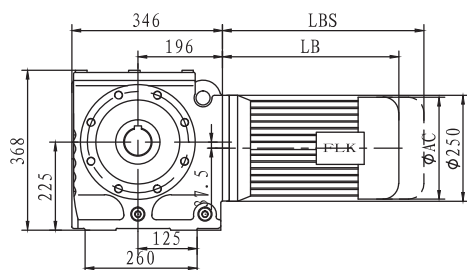




SA-A-Z-87
($\phi 70/\phi 60$)

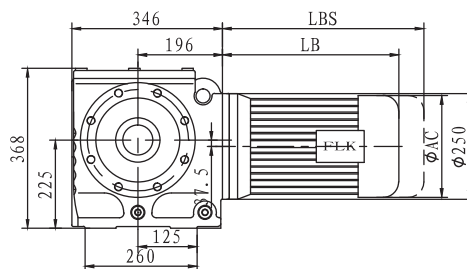

SA-H-Z-87

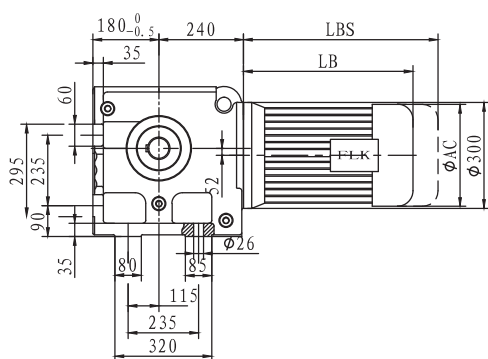



S-97

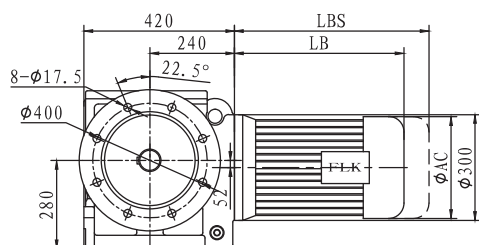






SA-F-97







未标注尺寸可相互参照

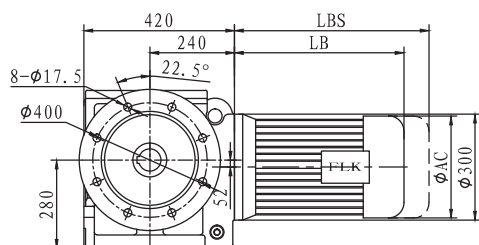

SA-A-F-97
(φ90/φ70)

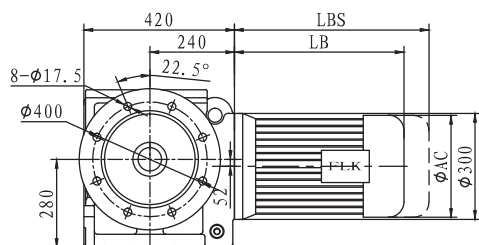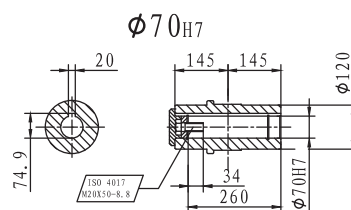




SA-H-F-97

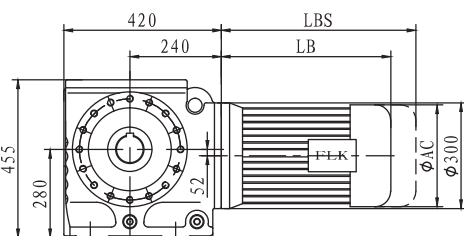





SA-A-97
(φ90/φ70)






未标注尺寸可相互参照

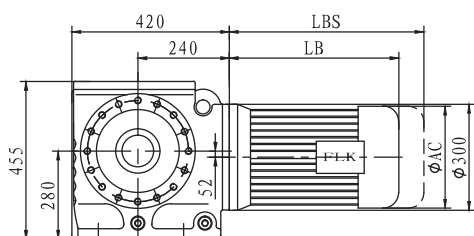




SA-H-97

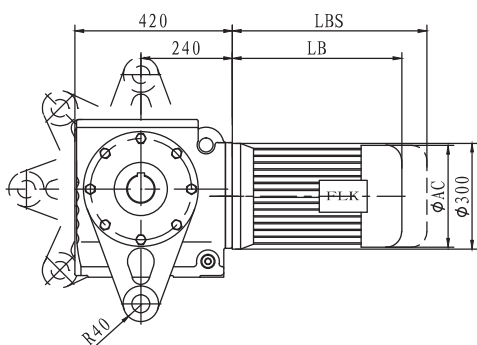

SA-A-T-97
($\phi 90/\phi 70$)

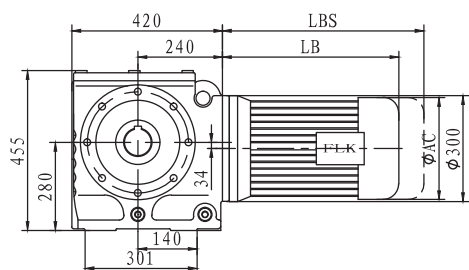

SA-A-Z-97
($\phi 90/\phi 70$)

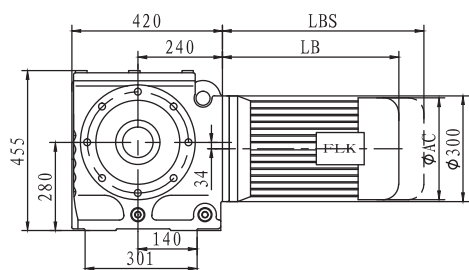


SA-H-Z-97



未标注尺寸可相互参照


S-AD轴输入型外形尺寸图

S-AD:Dimension Sheet For Input Shaft Type

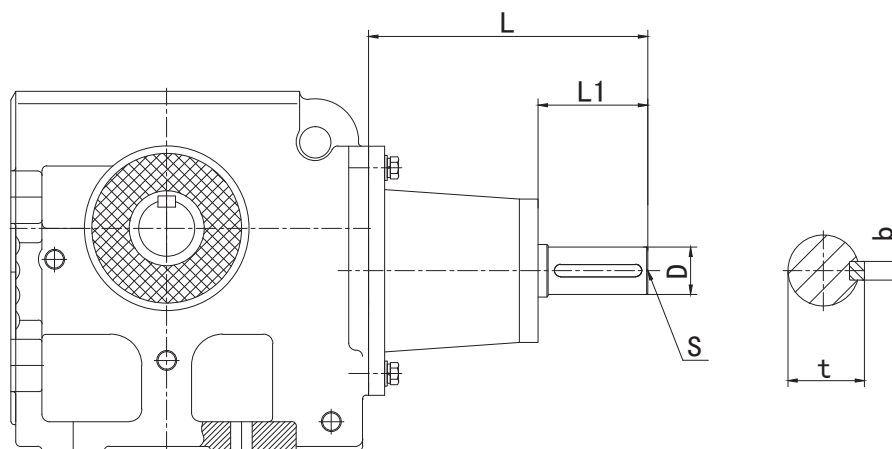

型号 Gear unit type		输入轴尺寸/Input shaft dimension					
		L	L1	D	t	b	S
S37	AD1	102	40	16	18	5	M5
	AD2	128	40	19	21.5	6	M8
S47	AD2	123	40	19	21.5	6	M5
	AD3	159	50	24	27	8	M8
S57	AD2	128	40	19	21.5	6	M8
S67	AD2	123	40	19	21.5	6	M6
S77	AD3	150	50	24	27	8	M8
	AD4	224	80	38	41	10	M12
S87	AD3	156	60	28	31	8	M10
	AD4	219	80	38	41	10	M12
	AD5	292	110	42	45	12	M16
S97	AD4	214	80	38	41	10	M12
	AD5	287.5	110	42	45	12	M16
	AD6	309	110	48	51.5	14	M16

S-RF多级串联型减速机外形尺寸图
S-RF Multi-stage Reducer Dimension

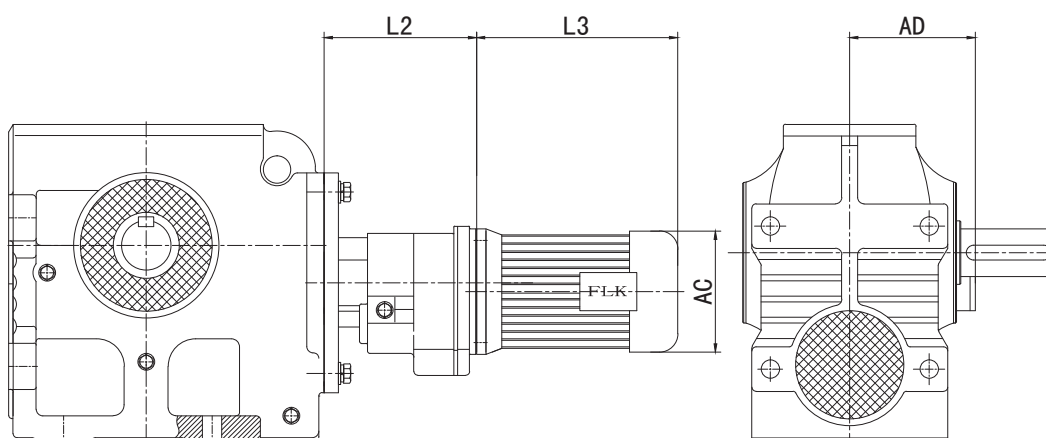


S

型号	机座号	L2	L3	AD	AC
S-67-RF-F-37	Y63	157	222	70	130
	Y71		242	80	145
	Y80		283	145	175
S-77-RF-F-37	Y63	157	222	70	130
	Y71		242	80	145
	Y80		283	145	175
	Y90		322	155	195
S-87-RF-F-57	Y63	187	222	70	130
	Y71		242	80	145
	Y80		283	145	175
	Y90		322	155	195
	Y100		355	180	215
S-97-RF-F-57	Y63	187	222	70	130
	Y71		242	80	145
	Y80		283	145	175
	Y90		322	155	195
	Y100		355	180	215
	Y112		371	190	240


S-AM轴输入型外形尺寸图

S-AM:Dimension Sheet For Input Shaft Type

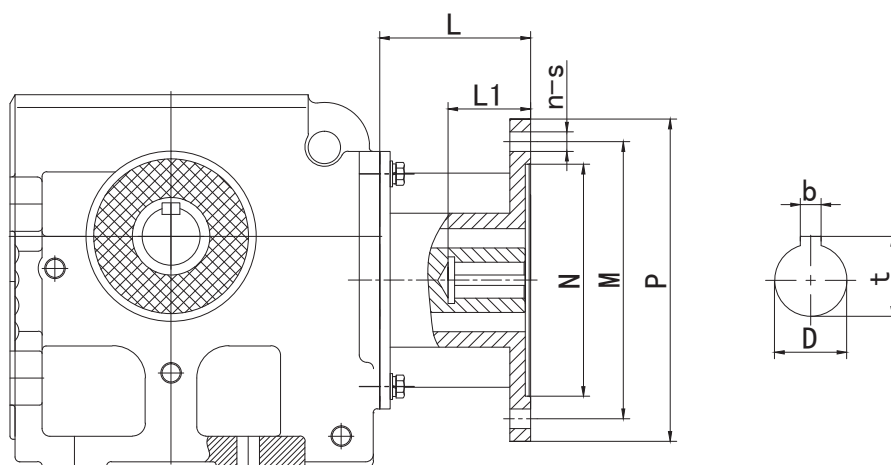

型号 Gear unit type		输入轴尺寸/Input shaft dimension										型号 Gear unit type		输入轴尺寸/Input shaft dimension									
		L	L1	D	b	M	N	P	s	t	n			L	L1	D	b	M	N	P	s	t	n
S37	Y63	65	34	11	4	115	95	140	10	12.8	8	S97	Y100	84.5	63	28	8	215	180	250	15	31.3	8
	Y71	65	34	14	5	130	110	160	10	16.3	8		Y112	96	85	38	10	265	230	300	15	41.3	8
	Y80	65	45	19	6	165	130	200	12	21.8	8		Y132	96	85	38	10	265	230	300	15	41.3	8
	Y90	65	51	24	8	165	130	200	12	27.3	8		Y160	125	113.5	42	12	300	250	350	19	45.3	8
	Y100	95	70	28	8	215	180	250	15	31.3	8		Y180	125	113.5	48	14	300	250	350	19	51.8	8
	Y112	95	70	28	8	215	180	250	15	31.3	8		Y200	155	118.5	55	16	350	300	400	19	59.3	8
S47	Y71	65	34	14	5	130	110	160	10	16.3	8												
	Y80	96	42	19	6	165	130	200	12	21.8	8												
	Y90	96	54	24	8	165	130	200	12	27.3	8												
	Y100	79.5	66	28	8	215	180	250	15	31.3	8												
	Y112																						
S57	Y71	65	34	14	5	130	110	160	10	16.3	8												
	Y80	65	45	19	6	165	130	200	12	21.8	8												
	Y90	65	51	24	8	165	130	200	12	27.3	8												
	Y100	95	70	28	8	215	180	250	15	31.3	8												
	Y112																						
S67	Y71	65	34	14	5	130	110	160	10	16.3	8												
	Y80	96	42	19	6	165	130	200	12	21.8	8												
	Y90	96	54	24	8	165	130	200	12	27.3	8												
	Y100	79.5	66	28	8	215	180	250	15	31.3	8												
	Y112																						
S77	Y80	91	64	19	6	165	130	200	12	21.8	8												
	Y90	121	64	24	8	165	130	200	12	27.3	8												
	Y100	121	64	28	8	215	180	250	15	31.3	8												
	Y112																						
	Y132	121	84	38	10	265	230	300	15	41.3	8												
	Y160	155	115	42	12	300	250	350	19	45.3	8												
S87	Y90	84.5	63	24	8	165	130	200	12	27.3	8												
	Y100	84.5	63	28	8	215	180	250	15	31.3	8												
	Y112																						
	Y132	96	85	38	10	265	230	300	15	41.3	8												
	Y160	125	116	42	12	300	250	350	19	45.3	8												
	Y180	125	116	48	14	300	250	350	19	51.8	8												

K·R·F·S系列与电机直联时电机外形尺寸图 / Outline Dimensional Drawing For Special Motors

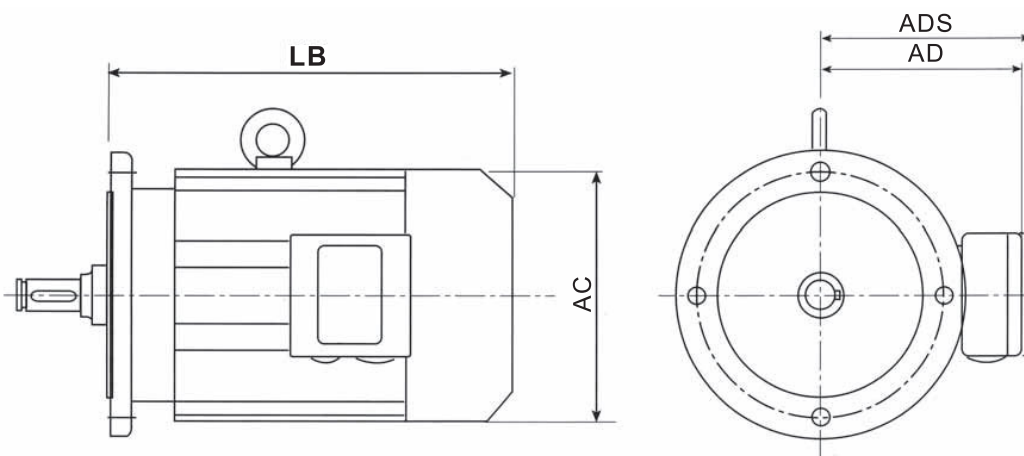

S

电机机座号 / Motor Size	LB	AC	AD
Y63	222	130	70
Y71	242	145	80
Y80	283	175	145
Y90S	297	195	155
Y90L	322	195	155
Y100L	355	215	180
Y112M	371	240	190
Y132S	410	275	210
Y132M	450	275	210
Y160M	494	330	255
Y160L	550	330	255
Y180M	585	380	280
Y180L	625	380	280
Y200L	660	420	305
Y225S	680	470	335
Y225M	705	470	335
Y250M	770	510	370
Y280S	835	580	410
Y280M	885	580	410
Y315S	1040	645	530
Y315M	1150	645	530
Y315L	1150	645	530

说明：图中ADS为隔爆等特殊电机接线盒所示尺寸，此处未列出，如有需要，请向我们咨询。

ADS is the dimension for the explosion-proof motors and other special motors, please contact us for details.